

www.faitful.cc

To export all Faithful products and help customers to find high quality products and perfect price sources in Chinese Market.

○ 电话印刷: 13803230342 18713795967



www.faitful.cc

FAITHFUL[®]

Professional Laboratory Apparatus Manufacturer
Professional Service Teams

— VERSION: 2024.05 —

FAITHFUL INSTRUMENT (HEBEI) CO.,LTD

Add: Faithful Technology Park, No.26 Road, East Development
Zone, Huanghua, Cangzhou, Hebei Province, China
061100

Sales: 0086-317-5337349

FAX: 0086-317-5338349

P.O.:061100

E-mail: info@faitful.cc

Service E-mail: service@labinstrument.cn

Website: www.faitful.cc



FAITHFUL
INSTRUMENT (HEBEI) CO.,LTD
www.faitful.cc





Entrepreneurial spirit: pragmatic, professional, innovative, high-quality
 Development strategies: people foremost, technology based, market oriented
 Behavior idea: sincere cooperation, enthusiastic service
 Management idea: generous honesty, mutual benefit, develop together
 Service idea: responsible for brand, always satisfy customers



Every laurel will accompany each step of Faithful's development
 But Faithful always think that the honor belongs to the yesterday
 Not represents today and tomorrow
 The current honors only the reason for us to reach new height
 Faithful will always make effort for better tomorrow



FAITHFUL
 FAITHFUL INSTRUMENT (HEBEI) CO., LTD.

Leap over the pinnacle
 We occupy the first-class devices
 Elaborately Create
 we have the advantage of first-class brand



COMPANY INTRODUCTION

Faithful
Instrument (Hebei) Co., Ltd

Faithful Instruments (Hebei) Co., Ltd. was founded in 2011. The main production of laboratory equipment and medical equipment, the products in domestic and foreign research institutes and university laboratories have been widely used. After ten years of development, the company has become a collection of research and development, production, sales as one of the group high-tech enterprises.

The new factory with a total investment of 120 million yuan, the standard factory of 20,000 square meters, the company has more than 100 employees, an annual output of more than 30,000 sets of various series of finished products, can achieve an annual output value of 100 million yuan, and achieve export earnings of 10 million US dollars.

The company has passed ISO9001 quality system certification and EU CE certification. The main products include: drying oven, incubator, cooling incubator, shaker, muffle furnace, laminar flow cabinet, constant temperature and humidity incubator, climate chamber with humidity control plant growth chamber, climate chamber with illumination, heating magnetic stirrer, heating mantle, water bath, water tank, heating plate, etc.

While actively developing the domestic market, we are more committed to the development of the international market. At present, there are more than one hundred agents all over the world, including Germany, France, Poland, Russia, the Netherlands, Turkey, Japan, South Korea, Malaysia, the United States, Mexico, Iraq, etc.



ADVANCED PRODUCTION EQUIPMENT



CONTENTS

Drying Ovens

Forced Air Drying Oven	01
Constant-temperature Drying Oven	02
Horizontal Drying Oven	03
Horizontal Drying Oven (Anti-corrosive Type)	04
Hot Air Sterilizing Drying Oven	05
Portable Drying and Sterilizing Oven	06
Drying oven/Incubator (Double function)	07
Vacuum Drying Oven	08
Precision Vacuum Drying Oven	09
Automatic Precision Vacuum Drying Oven	10
Big Forced Air Drying Oven	11
Desktop Constant-temperature Drying Oven/Incubator	12
500°C/600°C High Temperature Forced Air Drying Oven	13

Incubators

CO2 Incubator	14
Constant-Temperature Incubator	15
High Precision Constant Temperature Incubator	16
Constant-temperature Incubator	17
Portable Incubator	18

Cooling Incubators

Precision Cooling Incubator/BOD Incubator Refrigerated Incubator	19
-10°C Cooling Incubator/BOD Incubator Refrigerated Incubator	20
Cooling Incubator/Refrigerated Incubator/ Bod Incubator	21
Mould Cultivation Cabinet	22
Constant Temperature and Humidity Incubators	23
Climate Chamber With Illumination	24
Climate Chamber with Humidity Control Plant Growth Chamber	25

Shakers

Semiconductor Refrigeration Incubator/Peltier Incubator	26
Vertical Constant Temperature Shaker (LCD)	27
Desktop Constant Temperature Shaker(LCD)	28
Multifunctional Water Baths Shaker	29
Constant Temperature Shaking Incubator	30
Orbital Shaker	31

Ceramic Fiber Muffle Furnace

1200°C Ceramic Fiber Muffle Furnace	32
1600°C Ceramic Fiber Muffle Furnace	33
1700°C Ceramic Fiber Muffle Furnace	34

Laminar Flow Cabinets

New Laminar Flow Cabinet	35
Mini Laminar Flow Cabinet/Mini Fume Hood	36

Laminar Flow Cabinet (Desktop Type)	37
CLASS II A2 Biosafety Cabinet	38

Magnetic Stirrers

Magnetic Stirrer	39
Ceramic Magnetic Stirrer	40
Overhead Stirrer	41
Mini Magnetic Stirrer	42
Four Rows Magnetic stirrer	42

Heating Mantles

Electronic Control Heating Mantle	43
Magnetic Stirring Heating Mantles	43
Digital Display Heating Mantle	44
Digital & Magnetic Stirring Heating Mantles	44
Several Rows Magnetic Stirring Heating Mantles	45
Hot Plate	45
New Hot Plate, Graphite Hot Plate	46

Water Bath、Water Tank

Thermostatic Water Baths	47
Thermostatic Water Baths(Stretching Inner Chamber)	48
Transparent Water Bath	49
Thermostatic Water Baths	50
Thermostatic water tank (Stretching Inner Chamber)	51
Big Size Water Baths	52

Ultrasonic Cleaner

Ultrasonic Cleaner Digital Model,With Timer And Heater	53
Ultrasonic Cleaner Digital Series, With timer	53

Steam Sterilizer, Water Distiller

Portable Pressure Steam Sterilizer	54
Portable Pressure Steam Sterilizer	54
Portable Pressure Steam Sterilizer	54
Vertical Pressure Steam Sterilizer	55
Stainless Steel Water Distiller (Automatic Control Type)	56

Other Product Series

FSF-300 Basic Power Supply	56
FSF-600 Basic Power Supply	57
FSF-300C Universal Power Supply	57
FSF-600C Universal Power Supply	57
FSF-SPAT Horizontal Electrophoresis Cell	58
FSF-SPBT Horizontal Electrophoresis	58
Mini-Protean Vertical Electrophoresis Cell FSF-SCZ2+	59
Mini-Protean Electrophoresis Cell FSF-SCZ4+	59
Digital Centrifuge FLC-04R-C	60
Digital Tabletop Low Speed Centrifuge	60

Forced Air Drying Oven

Used for drying, baking, wax, heat treatment.

Characteristics:

- Horizontal air circularly by double air ducts, high efficiency and high uniformity.
- PID controller, with over-temperature protection function.
- With fan switch, LED digital display, high temperature blast motor.
- New anti-hot handle

WGLL-BE series have the following characteristics other than the above functions.

- LCD temperature controller.
- 4 grades speed fan, adjustable for different requirements.
- Over-temperature protection system.
- High precision digital independent temperature limiter.
- 304:SUS304 Stainless Steel Body.
- WGLL-230BE and WGLL-625BE don't have fan switch.



Patent No. : ZL 2018 3 0094606.5

Main Technical Parameters:

Model	WGL-30B	WGL-45B	WGL-65B	WGL-85B	WGL-125B	WGL-230B	WGL-625B
	WGLL-30BE	WGLL-45BE	WGLL-65BE	WGLL-85BE	WGLL-125BE	WGLL-230BE	WGLL-625BE
WGLL-30BE(304) WGLL-45BE(304) WGLL-65BE(304) WGLL-85BE(304) WGLL-125BE(304) WGLL-230BE(304)							
Function	Cycle Mode						
	Forced convection						
	Temp. Range						
	RT+10~300°C						
	Temp. Resolution Ratio						
Structure	Temp. Motion						
	Temp. Uniformity						
	Inner Chamber						
	Outer Shell						
	Insulation Layer						
Controller	Heater						
	Power Rating						
	Exhaust Hole						
	Temp. Control Mode						
	Temp. Setting Mode						
Specification	Temp. Display Mode						
	Timer						
	Operation Function						
	Additional Function						
	Sensor						
Accessory	Safety Device						
	Inner Chamber Size(W*L*H)(mm)						
	Exterior Size (W*L*H)(mm)						
	Packing Size (W*L*H)(mm)						
	Volume						
optional accessories	Max. Shelf Number						
	Load Per rack						
	Shelf Space						
	Power Rating (50/60HZ)						
	NW/GW (kg)						
optional accessories	Shelf						
	Shelf Frame						
	B type: Spare shelf, BE type: Spare shelf, RS485 interface, printer, Program controller, U-disk storage;						
	3.5-inch color touch screen temperature controller.						

Constant-temperature Drying Oven

◎ Used for drying, baking, heat treatment .

Characteristics:

- In the workroom, the hot air is convective naturally and cyclically.
- PID micro-computer intelligent temperature controller with functions of over-temperature protection.
- Standard highlight LED instrument running light.
- New anti-hot handle.

WHLL-BE series have the following characteristics other than the above functions.

- LCD temperature controller.
- Over-temperature protection system.
- High precision digital independent temperature limiter.



Patent No. : ZL 2018 3 0094606.5

Main Technical Parameters:

Model		WHLL-30B	WHLL-45B	WHLL-65B	WHLL-85B	WHLL-125B
		WHLL-30BE	WHLL-45BE	WHLL-65BE	WHLL-85BE	WHLL-125BE
Cycle Mode		Natural convection				
Function	Temp. Range	RT+10~300℃				
	Temp. Resolution Ratio	0.1℃				
	Temp. Motion	±1℃				
	Temp. Uniformity	±3.5%				
Structure	Inner Chamber	Mirror Stainless Steel				
	Outer Shell	Cold rolling steel electrostatic spraying exterior				
	Insulation Layer	High quality rock wool board(with CE)				
	Heater	Nickel chromium alloy heating wire				
	Power Rating	0.8kW	1.2kW	1.6kW	2.0kW	2.5kW
Controller	Exhaust Hole	φ35mm top(with function of test hole)				
	Temp. Control Mode	Two temperature section PID intelligent				
	Temp. Setting Mode	Touch button setting				
	Temp. Display Mode	B model: display on LED BE model: display on LCD				
	Timer	0-9999min(with timing wait function)				
	Operation Function	Fixed temperature operation, fixed timing operation, auto stop.				
	Additional Function	B model: Sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power-off parameter memory BE model: High precision digital independent temperature limiter. sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power-off parameter memory				
	Sensor	PT100				
	Safety Device	B type: Over temperature sound-light alarm; BE type: Digital Independent Temp. limiter, Over temperature sound-light alarm.				
	Inner Chamber Size(W*L*H)(mm)	310*310*310	350*350*350	400*360*450	450*420*450	500*450*550
Specification	Exterior Size (W*L*H)(mm)	460*510*695	500*550*735	550*550*840	590*610*830	636*680*915
	Packing Size (W*L*H)(mm)	540*575*855	580*615*895	635*625*995	680*685*1000	710*730*1100
	Volume	30L	45L	65L	85L	125L
	Shelf Number	5	6	8	8	11
	Load Per Rack	15kg				
Accessory	Shelf Space	40mm				
	(50/60HZ)Current Rating	AC220V/3.6A	AC220V/5.5A	AC220V/7.2A	AC220V/10.5A	AC220V/10.5A
	NW/GW (kg)	33/37	37/43	44/49	50/60	60/66
	Shelf	2				
Optional Accessories		B type: Spare shelf; BE type: Spare shelf, RS485 interface, printer, Program controller, U-disk storage; SUSS304 body, 3.5-inch color touch screen temperature controller.				

Horizontal Drying Oven

◎ High precision and large density sample drying treatment.

Characteristics:

- Horizontal air type, high space utilization and good temperature uniformity.
- 101: Forced fan cooling intake structure, the maximum working temperature <50 ℃, the fan long-term longevity operation.
- 202:Classical natural convection drying method.
- New anti-hot handle.



Patent No. : ZL 2018 3 0094606.5

Main technical parameters:

Model		101-0A/101-0AB	101-1A/101-1AB	101-2A/101-2AB	101-3A/101-3AB
		202-0A/202-0AB	202-1A/202-1AB	202-2A/202-2AB	202-3A/202-3AB
Cycle Mode		101 means Forced convection; 202 means Natural convection			
Function	Temp. Range	RT+10~250℃			
	Temp. Resolution Ratio	0.1℃			
	Temp. Motion	±1℃			
	Temp. Uniformity	101 model ±2.5%, 202 model ±3.5%			
Structure	Inner Chamber	B model:High quality stainless steel; without B model:High strength galvanized sheet			
	Outer Shell	Cold rolling steel electrostatic spraying exterior			
	Insulation Layer	High quality rock wool board(with CE)			
	Heater	101 model with Stainless steel electric heating tube; 202 model with Nickel chromium alloy heating wire			
	Power Rating	1.2kW	1.6kW	2.3kW	3.0kW
Controller	Exhaust Hole	φ35mm top(with function of test hole)			
	Temp. Control Mode	Two temperature section PID intelligent			
	Temp. Setting Mode	Touch button setting			
	Temp. Display Mode	LED Digital display			
	Timer	0-9999min(with timing wait function)			
	Operation Function	Fixed temperature operation, fixed timing operation, auto stop.			
	Additional Function	Sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power-off parameter memory			
Specification	Sensor	PT100			
	Safety Device	Over temperature sound-light alarm			
	Inner Chamber Size(W*L*H)(mm)	350*350*350	450*350*450	550*450*550	600*500*750
	Exterior Size (W*L*H)(mm)	652*472*587	752*472*687	852*572*786	902*622*986
	Packing Size (W*L*H)(mm)	745*605*745	845*605*850	945*705*950	955*755*1150
	Volume	43L	71L	136L	225L
	Max Shelf Number	9	13	17	25
	Load Per Rack	15kg			
	Shelf Space	25mm			
	(50/60HZ)Current Rating	AC220V/5.5A	AC220V/7.3A	AC220V/9.1A	AC220V/13.6A
Accessory	NW/GW (kg)	40/46	45/50	62/68	77/96
	Shelf	2			
	Shelf Frame	4			
Optional Accessories		Shelves			

Horizontal Drying Oven [Anti-corrosive Type]

◎ Used to High precision and large density sample drying treatment

Characteristics:

- Horizontal air type, high space utilization and good temperature uniformity.
- SUS304 seal motor, Forced fan cooling intake structure, the maximum working temperature <50℃, so that the fan can run for a long time.
- SUS316 inner chamber and shelves, ensure the Anti-corrosion.
- New Anti-hot handle.



Main technical parameters:

Model		101-43F	101-71F	101-136F	101-225F
Circulation Mode		Forced Convection			
Function	Used Temp.Range	RT+10~250℃			
	Temp.Resolution	0.1℃			
	Temp.Fluctuation	± 1℃			
	Temp.Uniformity	± 2.5%			
Structure	Inner Chamber	SUS316 stainless steel			
	Outer Shell	Cold rolling steel electrostatic spraying exterior			
	Insulation Layer	High quality rock wool board(with CE)			
	Heater	Stainless steel electric heating tube			
Controller	Power Rating	1.2kW	1.6kW	2.3kW	3.0kW
	Exhaust Hole	Exhaust Hole φ 35mm top(with function of test hole)			
	Temp. Control Mode	Two Temperature Section PID Intelligent			
	Temp. Setting Mode	Touch button setting			
	Temp. Display Mode	Measuring Temperature: Display on the upper row; Setting Temperature: Display on the lower row (LED)			
	Timer	0-9999min(with timing wait function)			
	Operation Function	Fixed Temperature Operation, Timing Function, Auto Stop			
	Additional function	Sensor Deviation Correction, Temperature Overshoot Self-tuning, Internal Parameter Locking, Power-Off Parameter Memory			
	Sensor	pt100			
	Safety Device	Over Temperature Sound-light Alarm			
Specification	Inner Chamber Size(W*L*H)(mm)	350*350*350	450*350*450	550*450*550	600*500*750
	Exterior Size(W*L*H)(mm)	652*472*587	752*472*687	852*572*786	902*622*986
	Packing Size(W*L*H)(mm)	745*605*745	845*605*850	945*705*950	955*755*1150
	Volume	43L	71L	136L	225L
	Max Shelf Number	9	13	17	25
	Load Per Rack	15kg			
	Shelf Space	25mm			
	Current Rating(50/60HZ)	AC220V/5.5A	AC220V/7.3A	AC220V/9.1A	AC220V/13.6A
	NW/GW(KG)	33/37	45/50	62/68	77/96
	Shelf	2			
Accessory	Shelf Frame	4			
	Optional Accessories	Shelves , Program Controller			

Hot Air Sterilizing Drying Oven

◎ Easy to operate efficient dry heat sterilizer.

Characteristics:

- Horizontal air circularly by double Air ducts, high efficiency and high uniformity.
- PID controller, with over-temperature protection function.
- With fan switch,LED digital display,high temperature blast motor.
- New anti-hot handle.

GXBE series have the following characteristics other than the above functions.

- LCD temperature controller.
- 4 grades speed fan, adjustable for different requirements.
- Over-temperature protection system.
- High precision digital independent temperature limiter.
- 304:SUS304 Stainless Steel Body.



Patent No. : ZL 2018 3 0094606.5

Main Technical Parameters:

Model		GX-30B	GX-45B	GX-65B	GX-85B	GX-125B	GX-230B
		GX-30BE	GX-45BE	GX-65BE	GX-85BE	GX-125BE	GX-230BE
		GX-30BE(304)	GX-45BE(304)	GX-65BE(304)	GX-85BE(304)	GX-125BE(304)	GX-230BE(304)
Cycle Mode		Forced convection					
Function	Temp. Range	RT+10~300℃					
	Temp. Resolution Ratio	0.1℃					
	Temp. Motion	± 1℃					
	Temp. Uniformity	± 2.5%					
Structure	Inner Chamber	Mirror Stainless Steel					
	Outer Shell	Cold rolling steel electrostatic spraying exterior, 304: SUS304					
	Insulation Layer	High quality rock wool board (with CE)					
	Heater	stainless steel heater					
Controller	Power Rating	0.8kW	1.2kW	1.6kW	2.0kW	2.3kW	3.0kW
	Exhaust Hole	φ 35mm top (with function of test hole)					
	Temp. Control Mode	Two temperature section PID intelligent					
	Temp. Setting Mode	Touch button setting					
	Temp. Display Mode	B model:LED Digital Display BE model: LCD Digital display					
	Timer	0-9999min(with timing wait function)					
	Operation Function	Fixed temperature operation, fixed timing operation, auto stop.					
	Additional Function	B model: Sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power-off parameter memory BE model: High precision digital independent temperature limiter.4 grades 3 speed adjustable-speed fan (GX230BE without fan speed adjustor), sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power-off parameter memory					
	Sensor	PT100					
	Safety Device	B type: Over temperature sound-light alarm; BE type: Digital Independent Temp. limiter, Over temperature sound-light alarm.					
Specification	Inner Chamber Size(W*L*H)(mm)	310*310*310	350*350*350	400*360*450	450*420*450	500*450*550	600*500*750
	Exterior Size (W*L*H)(mm)	460*510*695	500*550*735	550*550*840	590*610*830	636*680*915	735*835*1115
	Packing Size (W*L*H)(mm)	540*575*855	580*615*895	635*625*995	680*685*1000	710*730*1100	857*885*1287
	Volume	30L	45L	65L	85L	125L	230L
	Shelf Number	5	6	8	8	11	17
	Load Per Rack	15kg					
	Shelf Space	40mm					
	Current Rating(50/60HZ)	AC220V/3.6A	AC220V/5.5A	AC220V/7.2A	AC220V/9.0A	AC220V/10.5A	AC220V/13.6A
	NW/GW (kg)	33/37	37/43	44/49	50/56	60/66	94/120
	Shelf	2					
Accessory	Shelf Frame	4					
	Optional Accessories	B type: Spare shelf, BE type: Spare shelf, RS485 interface, printer, Program controller, U-disk storage; 3.5-inch color touch screen temperature controller.					

Portable Drying and Sterilizing Oven

◎Used for industrial and mining enterprises, scientific research institute, laboratory drying in hospital health and other units, drying of dental instruments,sterilization.

Characteristics:

- Horizontal air circularly by double air ducts,high efficiency and high uniformity.
- 3.5 inch touch screen controller, two temperature section PID intelligent. Preset 4 operating temperatures, the temperature can be edited, select the mode, click run, run automatically, stop automatically , operation is convenient.
- Over temperature sound–light alarm,Sensor deviation correc–tion, temperature overshoot self–tuning, power–off parameter memory.



Patent No. : ZL 2018 3 0094606.5

Main Technical Parameters:

Model		FDS-30BE	FDS-65BE
Cycle Mode		Forced convection	
Function	Temp. Range	RT+10–300 ℃	
	Temp. Resolution Ratio	0.1 ℃	
	Temp. Motion	± 1 ℃	
	Temp. Uniformity	± 2.5%	
Structure	Inner Chamber	Mirror Stainless Steel	
	Outer Shell	Cold rolling steel electrostatic spraying exterior	
	Insulation Layer	High quality rock wool board	
	Heater	Stainless steel heater	
	Power Rating	0.8kW	1.6kW
Controller	Exhaust Hole	φ 35mm top(with function of test hole)	
	Temp.Control Mode	Two temperature section PID intelligent	
	Temp.Setting Mode	3.5 inch touch screen	
	Temp.Display Mode	Touch screen preset 4 mode settings, select a good mode to set the temperature time	
	Timer	0–9999min(with timing wait function)	
	Operation Function	Fixed temperature operation, fixed timing operation, auto stop	
	Additional Function	Over temperature sound–light alarm, Sensor deviation correction, temperature overshoot ,self–tuning, power–off parameter memory	
	Sensor	pt100	
	Safety Device	Over temperature alarm and cut off heating	
	Inner Chamber Size(W*L*H)(mm)	310*310*310	400*360*450
Specification	Exterior Size(W*L*H)(mm)	450*500*690	540*550*830
	Packing Size(W*L*H)(mm)	540*575*855	635*625*995
	Volume	30L	65L
	Shelf number	6	9
	Load Per Rack	15kg	
	Shelf Space	35mm	
	Power Rating(50/60HZ)	AC220V/3.6A	AC220V/7.2A
	NW/GW(kg)	33/37	44/49
	Shelf	2	
	Shelf Frame	4	
Optional Accessories		Spare shelf, RS485 Communication Interface	

Drying oven/Incubator (Double function)

◎Drying, baking, wax, heat treatment and bacterial culture in one chamber.

Characteristics:

- Horizontal air circularly by double air ducts, high efficiency and high uniformity.
- PID controller, with over–temperature protection function.
- With oven/Incubator change switch, fan switch; and high tem–perature blast motor, LED digital display.
- New anti–hot handle.

GP–BE series have the following characteristics other than the above functions.

- LCD temperature controller.
- 4 grades speed fan, adjustable for different requirements.
- Over–temperature protection system.
- High precision digital independent temperature limiter.
- 304:SUS304 Stainless Steel Body.



Patent No. : ZL 2018 3 0094606.5

Main Technical Parameters:

Model		GP-30B	GP-45B	GP-65B	GP-85B	GP-125B	GP-230B
		GP-30BE	GP-45BE	GP-65BE	GP-85BE	GP-125BE	GP-230BE
		GP-30BE(304)	GP-45BE(304)	GP-65BE(304)	GP-85BE(304)	GP-125BE(304)	
Cycle Mode		Forced convection					
Function	Temp. Range	Incubator:RT+5–80℃ Drying oven:80–300℃					
	Temp. Resolution Ratio	0.1℃					
	Temp. Motion	± 1℃					
	Temp. Uniformity	± 2.5%					
Structure	Inner Chamber	Mirror Stainless Steel					
	Outer Shell	Cold rolling steel electrostatic spraying exterior 304:SUS 304 embossed stainless steel shell					
	Insulation Layer	High quality rock wool board(with CE)					
	Heater	Stainless steel heater					
	Power Rating	0.8kW	1.2kW	1.6kW	2.0kW	2.3kW	3.0kW
	Exhaust Hole	φ 35mm top(with function of test hole)					
	Controller	Temp. Control Mode	PID Two temperature section intelligent				
Temp. Setting Mode		Touch button setting					
Temp. Display Mode		B model: LED Digital Display					
		BE model: LCD Digital display					
Timer		0-9999min(with timing wait function)					
Operation Function		Fixed temperature operation, timing function, auto stop.					
Additional Function		B model: Sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power-off parameter memory					
		BE model: High precision digital independent temperature limiter,4 grades 3 speed adjustable-speed fan (GP230B/BE without fan speed adjuster),sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power-off parameter memory					
Sensor		PT100					
Safety Device		B type: Over temperature sound-light alarm; BE type: Digital Independent Temp. limiter, Over temperature sound-light alarm.					
Specification	Inner Chamber Size(W*L*H)(mm)	310*310*310	350*350*350	400*360*450	450*420*450	500*450*550	600*500*750
	Exterior Size (W*L*H)(mm)	460*510*695	500*550*735	550*550*840	590*610*830	636*680*915	735*835*1115
	Packing Size (W*L*H)(mm)	540*575*855	580*615*895	635*625*995	680*685*1000	710*730*1100	857*885*1287
	Volume	30L	45L	65L	85L	125L	230L
	Shelf Number	5	6	8	8	11	17
	Load Per Rack	15kg					
	Shelf Space	40mm					
	Current Rating	AC220V/3.6A	AC220V/5.5A	AC220V/7.2A	AC220V/9.0A	AC220V/10.5A	AC220V/13.6A
Accessory	NW/GW (kg)	33/37	37/43	44/49	50/56	60/66	94/120
	Shelf	2					
	Shelf Frame	4					
Optional Accessories		B type: Spare shelf; BE type: Spare shelf, RS485 interface, printer, Program controller, remote control,U-disk storage; wireless SMS alarm, 3.5 inch color touch screen temperature controller.					

Vacuum Drying Oven

◎ For the design of drying heat sensitive and easy decomposition, easy oxidation material, inert gas into.



Patent No. : ZL 2018 3 0094764.0

Characteristics:

- 4-sides heating method, temperature conduction by shelves, more efficiency.
- With inflatable port, once-forming thermostability silica gel sealant strip, with good tightness
- Double layer observation glass window, inner is toughened glass, outside is resin protection plate, more safety.
- Fastening handle, convenient for opening and closing.

Main Technical Parameters:

Model		DZ-1BC II	DZ-2BC II	DZ-3BC II	DZ-4BC II
Heating Mode		Four walls heat conduction and decompression			
Function	Temp.Range	RT+10-250℃			
	Useful Vacuum Degree Range	<133Pa			
	Temp. Resolution Ratio	0.1℃			
	Temp.motion	± 1℃			
	Heating-Up Time	80min	100min	120min	120min
Structure	Inner Chamber	High Quality stainless steel			
	Outer Shell	Cold rolling steel electrostatic spraying exterior			
	Insulation Layer	High quality aluminum silicate cotton (with CE certification)			
	Heater	Stainless steel electric heat tube			
	Observation Window	Bullet-proof tempered glass			
	Vacuum Meter	Pointer type, accuracy class 1.6%			
	Nozzle Diameter	10mm			
Controller	Power Rating	0.8kW	1.4kW	2.0kW	3.0kW
	Temperature Control Mode	Two temperature section PID intelligent			
	Temperature Setting Mode	Touch button setting			
	Temperature Display Mode	Measuring temperature:display on the four digital tubes upper row; setting temperature; display on the lower row			
	Timer	0-9999min(with timing wait function)			
	Operation Function	Fixed temperature operation, timing function, auto stop			
	Additional Function	Sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power-off parameter memory			
Specification	Sensor	PT100			
	Safety Device	Over temperature sound-light alarm			
	Inner (W*L*H) (mm)	300*300*270	415*370*340	450*450*450	550*600*650
	Exterior (W*L*H) (mm)	480*480*606	560*540*680	640*590*780	740*740*1000
	Packing (W*L*H) mm	590*550*750	704*620*814	739*700*889	839*850*1109
	Volume	24L	52L	91L	214.5L
	Standard Shelf Number	4	6	7	8
	Load Per Rack	15kg			
	Shelf Space	40mm	40mm	50mm	70mm
	Current Rating (50/60Hz)	AC220V/3.6A	AC220V/6.3A	AC220V/9.1A	AC220V/13.6A
Accessory	NW/GW kg	42/52	67/92	82/105	170/200
	Shelf	2			
	Shelf Frame	4			
Optional Accessories		Silicone connecting tube, vacuum pump filter, vacuum pump			

Precision Vacuum Drying Oven

Characteristics:

- 4-sides Heating method, Temperature conduction by shelves, more efficiency.
- With inflatable port, once-forming thermostability Silica gel Sealant strip, with good tightness
- Double Observation glass window, inner is explosion - proof glass, outside is resin protection plate, more safety.
- Fastening handle, convenient for opening and closing.
- LCD controller,multiple groups of date3 display on one screen, intelligent PID control system, with PT100 sensor.
- LCD vacuum gauge, accuracy class 0.5, Mpa, Kpa, bar, Psi, KGF/cm² five pressure units optional switch.



Patent No.: ZL 2018 3 0094764.0

Main Technical Parameters:

Model		DZ-1BIV	DZ-2BIV	DZ-3BIV	DZ-4BIV
Heating Mode		Four walls heat conduction and decompression			
Function	Temp.Range	RT+10-250℃			
	Useful Vacuum Degree Range	<133Pa			
	Temp. Resolution Ratio	0.1℃			
	Temp.motion	± 1℃			
	Heating-Up Time	80min	100min	120min	120min
Structure	Inner Chamber	High Quality stainless steel			
	Outer Shell	Cold rolling steel electrostatic spraying exterior			
	Insulation Layer	High quality aluminum silicate cotton (with CE certification)			
	Heater	Stainless steel electric heat tube			
	Observation Window	Bullet-proof tempered glass			
	Vacuum Meter	LCD display, accuracy class 0.5			
	Nozzle Diameter	10mm			
	Power Rating	0.8kW	1.4kW	2.0kW	3.0kW
Controller	Temperature Control Mode	Two temperature section PID intelligent			
	Temperature Setting Mode	Touch button setting			
	Temperature Display Mode	LCD Color screen Liquid crystal displays multiple groups of data on one screen			
	Timer	0-9999min(with timing wait function)			
	Operation Function	Fixed temperature operation, timing function, auto stop			
	Additional Function	Sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power-off parameter memory			
	Sensor	PT100			
Safety Device		Over temperature sound-light alarm			
Specification	Inner (W*L*H) (mm)	300*300*270	415*370*340	450*450*450	550*600*650
	Exterior (W*L*H) (mm)	480*480*606	560*540*680	640*590*780	740*740*1000
	Packing (W*L*H) mm	590*550*750	704*620*814	739*700*889	839*850*1109
	Volume	24L	52L	91L	214.5L
	Number Of Shelf	4	6	7	8
	Load Per Rack	15kg			
	Shelf Space	40mm	40mm	50mm	70mm
	Current Rating (50/60Hz)	AC220V/3.6A	AC220V/6.3A	AC220V/9.1A	AC220V/13.6A
	NW/GW kg	42/52	67/92	82/105	170/200
Accessory	Shelf	2			
	Shelf Frame	4			
Optional Accessories		Silicone connecting tube, vacuum pump filter, vacuum pump			

Automatic Precision Vacuum Drying Oven

(Pluggable shelf heating)

It is designed for drying heat-sensitive, easily decomposed and easily oxidized substances. It is widely used in medicine, food, light industry, chemical industry, agricultural scientific research, environmental protection and other experimental fields.

Characteristics:

- SUS304 embossed stainless steel housing, SUS304 mirrored stainless steel studio, 5083 corrosion resistant aluminum plate.
- Independent pluggable shelf heating.
- Fixed value or program operation mode, true color 7.0-inch touch screen multi-section PID temperature controller, high temperature control accuracy, real-time temperature curve record, convenient for users to see the heating process. The program mode can realize temperature control and vacuum degree multi-stage programming operation to improve the experimental efficiency.
- Automatic vacuum degree control system, set the vacuum degree, automatically reach the set vacuum degree. Standard with inflatable port, manual and electric double set of exhaust device.
- Users can configure the vacuum pump, standard with the vacuum pump oil return device, convenient for customers to use, avoid the vacuum pump oil return.
- BLT type standard with vacuum pump, air pipeline equipped with air filter device, improve the service life of vacuum pump.



Patent No. : ZL 2018 3 0094764.0

Main Technical Parameters:

Model	DZ-2BL	DZ-3BL	DZ-4BL
Heating Mode	Sheft direct heating		
Function	Temp.Range RT+10~250℃		
Useful Vacuum Degree Range	<133Pa		
Temp. Resolution Ratio	0.1℃		
Temp.motion	±1℃		
Heating-Up Time	≤40 minutes		
Inner Chamber	SUS304 mirror stainless steel		
Outer Shell	SUS304embossed stainless steel, 5083 Corrosion resistant aluminum plate		
Insulation Layer	Aluminium silicate fibre		
Heater	Mica electrothermal film		
Observation Window	Bulletproof tempered glass		
Vacuum Sensor	Standard pressure sensor, absolute pressure accuracy class 0.25, vacuum touch screen display		
Exhaust device	Manualand electric double exhaust device		
Air intake port	Standard inflation port		
BLT Vacuum Pump System (BL:without Vacuum Pump)	Double stage rotary vane vacuum pump 2L/S	Double stage rotary vane vacuum pump 4L/S	Double stage rotary vane vacuum pump 6L/S
Nozzle Diameter	10mm		
Power Rating	BL: 1.2kW	BLT: 1.6kW	BLT: 2.0kW
Temperature Control Mode	7.0-inch LCD color touch screen multi-stage PID program temperature control		
Temperature Setting Mode	Touch Screen Type		
Temperature Display Mode	7.0-inch LCD color touch screen		
Timer	0-9999 minutes/0-9999 hours can adjust		
Operation Function	Fixed value operation, regular, automatic stop		
Fixed Value Mode	Control temperature and vacuum at the same time		
Program Mode	Control temperature and control vacuum at the same time, 30 programmable operation		
Additional Function	Vacuum pump oil return preventer		
Temperature Sensor	Real-time temperature curve recording with U disk data storage and export function		
Safety Device	Sebsor deviation correction, temperature overshoot self-setting, internal parameter locking, power off parameter memory		
Inner (W*L*H) mm	415*370*340	450*450*450	550*600*650
Exterior (W*L*H) mm	635*565*796	670*645*906	770*795*650
Packing (W*L*H) mm	(BLT:635*565*1296)	(BLT:670*645*1406)	(BLT:770*795*1606)
Volume	52L	91L	214.5L
Number Of Shelf	2		
Load Per Rack	15kg		
Shelf Space	140mm	185mm	265mm
Current Rating (50/60Hz)	AC220V/6.3A	AC220V/9.1A	AC220V/13.1A
NW/GW kg	BL: 67/92	BLT: 87/112	BL: 82/105
Shelf	2		
Shelf Frame	4		
Optional Accessories	Shelf(Independent temperature control),RS485 transfer to USB communication interface,Printer,WIFI control module		

Big Forced Air Drying Oven

Large capacity industrial high precision drying oven to meet the requirements of military industry.

Characteristics:

- PID or program temperature control controller, with over-temperature alarm system.
- Double doors ensure that use is convenient.
- Forced air system, with Low-noise fan, centrifugal cycle mothod, high temperature uniformity.



Patent No. : ZL 2018 3 0094606.5

Main Technical Parameters:

Model	DGF-4A	DGF-5A	DGF-6A	DGF-7A	DGF-8A
	DGF-4AB	DGF-5AB	DGF-6AB	DGF-7AB	DGF-8AB
Cycle Mode	Fan - forced circulation				
Function	Temp. Range RT+10~250℃				
Temp. Resolution Ratio	0.1℃				
Temp. Motion	±1℃				
Temp. Uniformity	±3%				
Inner Chamber	A: Iron inner chamber AB: Stainless steel inner chamber				
Outer Shell	Galvanized sheet electrostatic spraying exterior				
Insulation Layer	High quality rock wool board(with CE)				
Heater	Stainless steel heating tube				
Power Rating	6kW	6.6kW	9kW	12kW	15kW
Exhaust Hole	On top or side				
Temp. Control Mode	PID intelligent control or Multi - segment programmable control (optional)				
Temp. Setting Mode	Touch button setting				
Temp. Display Mode	LCD Digital Display				
Timer	0-9999min (with timing wait function))				
Operation Function	Fixed temperature operation, timing function, auto stop.				
Additional Function	Temperature deviation correction, menu locked, power-off memory				
Sensor	PT100				
Safety Device	One key to start overheat power off				
Inner Chamber Size (W*L*H)(mm)	800*800*1000	1000*1000*1000	1000*1000*1300	1200*1200*1300	1600*1200*1600
Exterior Size (W*L*H)(mm)	940*1000*1400	1040*1200*1400	1230*1200*1670	1330*1400*1670	1750*1400*2070
Packing Size (W*L*H)(mm)	1060*1090*1520	1260*1290*1520	1350*1300*1890	1550*1500*1890	1950*1500*1910
Volume	640L	1000L	1300L	1870L	3070L
Max. Shelf Number	11	11	11	11	12
Load Per Rack	30kg				
Shelf Space	70mm				
Power Supply (50/60HZ)	380V				
NW/GW (kg)	200	260	350	480	800
Shelf	2				
Shelf Frame	No				
Optional Accessories	Spare shelf, Program controller, RS485 interface, Printer Products of different specifications can be customized according to customer requirements.				

Desktop Constant-temperature Drying Oven
Desktop Constant-temperature Incubator

◎Light natural convection drying oven / incubator.

Characteristics:

- In the workroom, the hot air is convective naturally and cyclically.
- Digital display microcomputer intelligent PID temperature controller.
- New anti-hot handle.



Patent No. : ZL 2018 3 0094606.5

Main Technical Parameters:

Model		WHL-25A/WHL-25AB		WP-25A/WP-25AB	
Cycle Mode		Natural convection			
Function	Temp. Range	RT+10-300℃		RT+5-65℃	
	Temp. Resolution Ratio	0.1℃			
	Temp. Motion	± 1℃		± 0.5℃	
	Temp. Uniformity	± 3.5%		± 2.0℃	
Structure	Inner Chamber	B model: mirror stainless steel; without B model: High strength galvanized sheet			
	Outer Shell	cold rolling steel electrostatic spraying exterior			
	Insulation Layer	High quality rock wool board(with CE)			
	Heater	Nickel chromium alloy heating wire			
	Power Rating	0.6kW		0.18kW	
	Exhaust Hole	φ 35mm top (with function of test hole)			
Controller	Temp. Control Mode	Two temperature section intelligent PID			
	Temp. Set Mode	Touch button setting			
	Temp. Display Mode	Measuring temperature: display on upper row; Setting temperature:display on the lower row			
	Timer	0-9999min(with timing wait function)			
	Operation Function	fixed temperature operation, timing function, auto stop			
	Additional Function	Sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power-off parameter memory			
	Sensor	PT100			
Safety Device		over temperature sound-light alarm			
Specification	Inner Chamber Size(W*L*H)(mm)	260*260*260			
	Exterior Size (W*L*H)(mm)	380*455*568			
	Packing Size (W*L*H)(mm)	515*480*640			
	Volume	18L			
	Shelf Number	6			
	Load Per Rack	15kg			
	Shelf Space	29mm			
	(50/60HZ)Current Rating	AC220V/2.7A		AC220V/0.8A	
	NW/GW (kg)	15/22			
Accessory	Shelf	2			
Optional Accessories		Shelf			

500℃/600℃ High Temperature Forced Air
Drying Oven

Characteristics:

- Colour LCD display, PID controller, ensure the temperature more accurate and stable.
- SUS316 stainless steel inner chamber, four-corner semicircular arc transition, shelf can be removed freely, easy to clean.
- Ceramic fiber door seal, high temperature resistant circulating fan, long-term high temperature operation, long service life.
- B: 500℃
- BE: 600℃



Main Technical Parameters:

Model		FG-50B/50BE	FG-91B/91BE	FG-150B/150BE	FG-208B/208BE
Circulation Mode		Forced Convection			
Function	Temp.Range	B:RT+20-500℃, BE:RT+20-600℃			
	Temp.Resolution Radio	0.1℃			
	Temp.Motion	± 0.5℃			
	Temp.Uniformity	2.50%			
Structure	Inner Chamber	B: SUS316L; BE: SUS309S			
	Outer Shell	Cold rolling steel electrostatic spraying exterior			
	Insulation Layer	Alumina Silicate Fibre			
	Heater	SUS304 Stainless steel electric heat tube			
Controller	Power Rating	3.6kW	4.5kW	4.8kW	5.1kW
	Exhaust Hole	φ 35mm top (with function of test hole)			
	Temp.Control Mode	Two temperature section PID intelligent			
	Temp.Setting Mode	Touch button setting			
	Temp. Display Mode	Measuring temperature display on upper LCD screen, setting temperature display on the lower row.			
	Timer	0-9999min(with timing wait function)			
	Operation Function	Fixed temperature operation, fixed timing operation, auto stop			
	Additional function	Sensor deviation correction, temperature overshoot self-tuning, internal parameter lock-ing, power-off parameter memory			
	Sensor	Hight Precision K type			
Safety Device		Over temperature sound-light alarm			
Specification	Inner Chamber Size(W*L*H)(mm)	350*350*400	450*450*450	500*500*600	570*620*595
	Exterior Size(W*L*H)(mm)	781*529*645	881*629*789	931*679*939	1001*799*934
	Packing Size(W*L*H)(mm)	901*649*845	1001*749*989	1051*799*1139	1121*919*1149
	Volume	50L	91L	150L	208L
	Max Shelf Number	4	6	7	7
	Load Per Rack	15kg			
	Shelf Space	45mm			
	Current Rating(50/60HZ)	AC380V/5.5A	AC380V/6.8A	AC380V/7.3A	AC380V/7.7A
	NW/GW(KG)	44/54	60/75	80/95	110/125
Accessory	Shelf	2			
	Shelf Frame	4			
Optional Accessories		Spare shelf, Program controller			

CO2 Incubator

Characteristics:

- Full-color 5.0-inch touch screen.
- Standard imported infrared high-precision CO2 concentration sensor.
- Has three levels of authority management function, with ultraviolet sterilization, wet heat sterilization, high temperature sterilization three sterilization methods.
- Six side heating air jacket heating system, while the design of a reasonable air duct mechanism, good temperature uniformity, heating, rapid return temperature.
- Adopts chassis reservoir design with large evaporation area and fast moisture return. With a door heating device, can avoid the inner door glass condensation. The product is equipped with high efficiency filter and intake filter to ensure the cleanliness of the air in the working room.



Main Technical Parameters:

Model		FC-50	FC-80	FC-150	FC-180
Heating Type		Air Jacket			
Performance	Temp. range	RT+5~55℃			
	Temp. resolution	0.1℃			
	Temp. fluctuation	±0.1℃			
	Temp. uniformity	±0.3℃			
	CO2 Sensor	Infrared Sensor/measuring range: 0.0~21.0%			
	CO2 control range	0.0~20.0%			
Construction	CO2 control accuracy	±0.1%			
	Inner Chamber	Heating steel			
	Outer Shell	Cold-Roll Steel Sheet, Surface electrostatic spraying			
	Insulating layer	Polyurethane			
	Heater	Heating sheet			
	Humidity Method	Disk humidifier			
Controller	Rated power	0.4kW	0.5kW	0.6kW	0.7kW
	Gas vent	φ 27mm rear (with test hole function)			
	Other	HEPA filter			
	Temp. Control Mode	PID control			
	Temp. Setting Mode	5.0-inch touch screen			
	Temp. Display Mode	Temperature displayed on left, concentration displayed on right screen			
Specification	Timer	0~9999 minutes (with timing wait function)			
	Operation Function	Fixed value operation, timed operation, automatic stop			
	Sterilization function	Uv sterilization, wet heat sterilization, Sterilization at high temperature 140/180℃			
	Additional function	Sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power off parameter memory			
	Sensor	PT100, water level sensor, infrared CO2 sensor			
	Safety device	High temperature alarm, concentration alarm, other alarm			
Accessory	Inner Chamber(W*D*H)	345*375*388	404*439*454	509*472*632	540*500*670
	Exterior Size(W*D*H)	500*500*655	585*585*766	593*746*842	629*791*893
	Packing Size (W*D*H)	620*620*855	705*705*966	713*866*1042	749*911*1093
	Volume	50L	80L	150L	180L
	Max. Shelf Number	4	5	6	7
	Load per Shelf	15kg			
Optional Accessories	Shelf Space	35mm			
	Supply(50/60HZ)	AC220V/1.8A	AC220V/2.3A	AC220V/2.7A	AC220V/3.2A
	Current Rating				
	N.W/G.W(kg)	55/70	97/112	93/108	115/130
	Standard Shelf number	2			
	Standard Shelf rack	4			
Optional Accessories		(Optional 90℃ wet heat sterilization carbon dioxide infrared sensor) Separator, printer			

Constant-Temperature Incubator

◎ Classical bacterial microorganism incubator.



Characteristics:

Patent No. : ZL 2018 3 0095051.6

- New panel 5 degree angle, new rotary switch for glass inner door, convenient to use.
- The double door structure adopts high quality glass, easy to observe samples, the door with magnetic strip is easy to be opened and closed, good sealing.

Main Technical Parameters:

Model		DH3600 II	DH4000 II	DH5000 II	DH6000 II
		DH3600B II	DH4000B II	DH5000B II	DH6000B II
Cycle Mode		Natural convection			
Function	Temp. Range	RT+5~70℃			
	Temp. Resolution Ratio	0.1℃			
	Temp. Motion	±0.5℃			
	Temp. Uniformity	±1.5℃			
Structure	Inner Chamber	B :mirror stainless steel; without B :High strength galvanized sheet			
	Outer Shell	Cold rolling steel electrostatic spraying exterior			
	Insulation Layer	High quality foam board			
	Heater	Mica electrothermal film			
Controller	Power Rating	0.35kW	0.45kW	0.6kW	0.7kW
	Exhaust Hole	φ 35mm top with function of test hole			
	Temp. Control Mode	PID Intelligent			
	Temp. Setting Mode	Touch button setting			
Specification	Temp. Display Mode	Measuring temperature: LED upper row; setting temperature: LED lower row			
	Timer	0~9999min (with timing wait function)			
	Operation Function	Fixed temperature operation, timing function, auto stop.			
	Additional Function	Sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power-off parameter memory			
Accessory	Sensor	PT100			
	Safety Device	Over temperature sound-light alarm			
	Inner Chamber Size(W*L*H)(mm)	350*350*350	400*350*450	500*450*550	600*580*600
	Exterior Size (W*L*H)(mm)	525*480*620	575*480*720	675*580*820	775*710*870
Optional Accessories	Packing Size (W*L*H)(mm)	595*562*795	645*562*885	745*662*990	845*792*1040
	Volume	45L	65L	125L	210L
	Shelf Number	7	10	13	14
	Load Per Rack	15kg			
	Shelf Space	35mm			
	Current Rating	AC220V/1.1A	AC220V/1.1A	AC220V/2.3A	AC220V/2.7A
Optional Accessories	NW/GW (kg)	27/40	32/45	45/60	55/70
	Shelf	2			
Optional Accessories		Shelf			

High Precision Constant Temperature Incubator

High precision bacterial microbial incubator.

Characteristics:

- The double door structure adopts high quality glass, easy to observe samples, the outdoor with magnetic strip is easy to be opened and closed, good sealing, open door power-off function.
- Standard lights, UV lamps, with breeze circulation fan.
- High precision digital independent temperature limiter.
- With function of cutting off UV lamp by open door.



Patent No. : ZL 2018 3 0095051.6

Main Technical Parameters:

Model		DH45L	DH65L	DH125L	DH210L
Cycle Mode		Breeze circulation			
Function	Tem. Range	RT+5~70℃			
	Tem. Resolution Ratio	0.1℃			
	Tem. Motion	± 0.5℃			
	Tem. Uniformity	± 0.8℃			
Structure	Inner Chamber	Mirror stainless steel			
	Outer Shell	Cold rolling steel electrostatic spraying exterior			
	Insulation Layer	High quality foam board			
	Heater	Mica electrothermal film			
	Power Rating	0.35kW	0.45kW	0.6kW	0.7kW
	Exhaust Hole	φ 35mm top(with function of test hole)			
Controller	Tem. Control Mode	PID Intelligent			
	Tem. Setting Mode	Touch button setting			
	Tem. Display Mode	Digital temperature: LCD upper row; Setting temperature: the lower row			
	Timer	0~9999 min (with timing wait function)			
	Operation Function	Fixed temperature operation, timing function, auto stop.			
	Additional Function	Breeze Circulation fan, UV lamp, LED Floodlight, Sensor deviation correction, temperature overshoot self-tuning, power-off parameter memory			
Specification	Sensor	PT100			
	Safety Device		Digital independent temp limiter, over temperature sound-light alarm		
	Inner Chamber Size(W*L*H)(mm)	350*350*350	400*350*450	500*450*550	600*580*600
	Exterior Size (W*L*H)(mm)	525*480*640	575*480*740	675*580*840	775*710*890
	Packing Size (W*L*H)(mm)	595*562*795	645*562*885	745*662*990	845*792*1040
	Volume	45L	65L	125L	210L
	Shelf Number	7	10	13	14
	Load Per Rack	15kg			
	Shelf Space	35mm			
	Supply(50/60HZ)Current Rating	AC220V/1.6A	AC220V/2.0A	AC220V/2.7A	AC220V/3.2A
	NW/GW (kg)	27/40	32/45	45/60	55/70
Accessory	Shelf	2			
	Shelf Frame	4			
Optional Accessories		Spare shelf, Port, USB data storage			

Constant-temperature Incubator

High precision experimental bacterial incubator.

Characteristics:

- Unique vertical double duct supply horizontal air circularly.
- 4 grades 3 speed adjustable speed fan, LED running indicator light.
- Over-temperature protection system: LED red light on meanwhile cut off heating circuit to improve product safety when workroom temperature exceed the alarm value.
- High precision digital independent temperature limiter.
- 304:SUS304 Stainless Steel Body.



Patent No. : ZL 2018 3 0095051.6

Main Technical Parameters:

Model		WPL-30BE	WPL-45BE	WPL-65BE	WPL-85BE	WPL-125BE	WPL-230BE
		WPL-30BE(304)	WPL-45BE(304)	WPL-65BE(304)	WPL-85BE(304)	WPL-125BE(304)	WPL-230BE(304)
Function	Cycle Mode	Forced convection					
	Temp. Range	RT+5~120℃					
	Temp. Resolution Ratio	0.1℃					
	Temp. Motion	± 1℃					
	Temp. Uniformity	± 1.0℃					
Structure	Inner Chamber	Mirror Stainless Steel					
	Outer Shell	Cold rolling steel electrostatic spraying exterior					
	Insulation Layer	High quality foam board					
	Heater	Stainless steel electric heating tube					
	Power Rating	0.4kW	0.5kW	0.7kW	0.9kW	1.1kW	1.5kW
Controller	Exhaust Hole	φ 35mm top(with function of test hole)					
	Temp Control Mode	Two temperature section intelligent PID					
	Temp. Setting Mode	Touch button setting					
	Temp. Display Mode	Measuring temperature: LCD upper screen; setting temperature: LCD lower row					
	Timer	0~9999min(with timing wait function)					
	Operation Function	Fixed temperature operation, fixed timing function, auto stop.					
	Additional Function	Digital Independent temp. limiter. 4grades 3 speed adjustable speed fan(230 without fan speed adjutor) Sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power-off parameter memory					
Specification	Sensor	PT100					
	Safety Deive		Over temp. sound-light alarm, Digital Independent temp. limiter				
	Inner Chamber Size(W*L*H)(mm)	310*310*310	350*350*350	400*360*450	450*420*450	500*450*550	600*500*750
	Exterior Size (W*L*H)(mm)	460*510*695	500*550*735	550*550*840	590*610*830	636*680*915	735*835*1115
	Packing Size (W*L*H)(mm)	540*575*855	580*615*895	635*625*995	680*685*1000	710*730*1100	857*885*1287
	Volume	30L	45L	65L	85L	125L	230L
	Shelf Number	5	6	8	8	11	17
	Load Per Rack	15kg					
	Shelf Space	40mm					
	Current Rating	220V/1.8A	220V/2.3A	220V/3.2A	220V/4.1A	220V/5A	220V/6.8A
	NW/GW (kg)	33/37	37/43	44/49	50/56	60/66	94/120
Accessory	Shelf Fame	4					
	Shelf	2					
Optional Accessories		Shelf, U-disk storage, Printer, 3.5-inch color touch screen temperature controller.					

Portable Incubator

◎ It is used for industrial and mining enterprises, food processing, agriculture, biochemistry, biology, medicine industry of bacteria, microbe and other small culture experiments.

Characteristics:

- Internal naturally air convection, four sides heating method, to make inner temperature uniformity.
- Mirror stainless steel inner chamber, four corners arc transition easy to clean.
- PID controller, with over-temperature protection function, with over-temperature alarm, sensor fault alarm, fixed value operation, regular operation, deviation correction, menu locking and other functions.
- With high quality glass window and installed LED light on the door, easy to observe the sample inside, especially under dark conditions.
- Portable design, the top handle is easy to move, optional 12V vehicle power supply, vehicle 12V, 100–240V can be used.



Patent No. : ZL 2019 2 0769300.4

Main Technical Parameters:

Model		DH2500AB	DH3000AB
Cycle Mode		Natural convection	
Function	Temp Range	RT+5–65℃	
	Temp Resolution Ratio	0.1℃	
	Temp Motion	± 0.5℃	
	Temp Uniformity	± 1.5℃	
Structure	Inner Chamber	Mirror stainless steel	
	Outer Shell	Cold rolling steel electrostatic spraying exterior	
	Insulation Layer	Polyurethane	
	Heater	Heating Element	
	Power Rating	0.08kW	0.12kW
Controlle	Temp Control Mode	PID Intelligent	
	Temp Setting Mode	Touch button setting	
	Temp Display Mode	Measuring temperature: LED upper row ; Setting temperature: the lower row	
	Timer	0–9999min (with timing wait function)	
	Operation Function	Fixed temperature operation, timing function, auto stop.	
	Additional Function	Sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power-off parameter memory	
	Sensor	PT 100	
	Safety Device	Over temperature sound–light alarm	
Specification	Inner Chamber Size(W*L*H)(mm)	230*200*200	230*200*280
	Exterior Size (W*L*H)(mm)	310*276*298	310*276*378
	Packing Size (W*L*H)(mm)	350*312*377	350*312*457
	Volume	9.2L	12.8L
	Shelf Number	2	
	Load Per Rack	5kg	
	Shelf Space	35mm	
	Supply(50/60HZ)Current Rating	AC220V/0.36A	AC220V/0.36A
	NW/GW (kg)	8\10	12\14
Optional Accessories		Vehicular/DC12V/AC110V/AC220VSupply	

Precision Cooling Incubator/BOD Incubator Refrigerated Incubator

◎ Various constant temperature experiments and environmental tests, water analysis, microbe culture of BOD / bacteria, plant breeding, and sample preservation.

Characteristics:

- Unique internal wind circulation structure design, fan breeze circulation.
- The double door structure, with high quality glass easy to observe the samples, the outer door with magnetic strip, good sealing.
- Colour LCD display and 30–stage program temperature control, double evaporators and automatic control intelligent defrosting to ensure long-term operating without defrost. standard independent temperature limiter, double protection for test safety.

BL model additional characteristics:

- 5.0 inch touch display 30–stage program control, round move, ladder operating.
- Sensor failure alarm, temperature curve, U–disk data storage, auto start.
- UV Lamp



Patent No. : ZL 2018 3 0095051.6

Main Technical Parameters:

Model		SPX–70BIV	SPX–150BIV	SPX–250BIV
		SPX–70BL	SPX–150BL	SPX–250BL
Cycle Mode		Forced convection		
Function	Temp. Range	0–65℃		
	Temp. Resolution Ratio	0.1℃		
	Temp. Motion	High Temp.: ± 0.5℃ Low Temp.: ± 1℃		
	Temp. Uniformity	± 1℃		
Structure	Inner Chamber	Mirror Stainless Steel		
	Outer Shell	Cold rolling steel electrostatic spraying exterior		
	Insulation Layer	Polyurethane		
	Heater	Stainless steel heating tube		
	Power Rating	0.8kW	1.0kW	1.2kW
	Compressor	Air cooled hermetic compressor		
	Cryogen	R134a		
	Defrost Structure	Double evaporator switching defrosting		
	Test Hole	43mm		
	Controlled External Power Supply	Universal socket (one) Built in waterproof socket (one)		
	Temp. Control Mode	BIV: Color screen LCD program BL: 5.0 inch touch screen		
	Temp. Setting Mode	Touch button setting or Touch screen type		
	Temp. Display Mode	Measuring temperature: LCD upper screen; setting temperature: LCD lower row		
	Timer	0–99.9h*30Segment		
Specification	Operation Function	Program operation		
	Sensor	PT100		
	Additional Function	BIV model: LED light, Deviation correction, Menu key lock, Power failure parameter memory		
		BL model additional character: loop self diagnosis		
Safety Device		Over temperature alarm, digital temperature limiter		
Specification	Inner Chamber Size(W*L*H)(mm)	420*350*500	500*500*600	600*500*840
	Exterior Size (W*L*H)(mm)	580*610*1190	660*760*1290	760*760*1530
	Packing Size (W*L*H)(mm)	706*698*1358	856*778*1458	878*865*1698
	Volume	70L	150L	250L
	Load Per Rack	15kg		
	Shelf Number	9	12	18
	Shelf Space	35mm		
	Power Supply Current Rating	AC220V/2.3A	AC220V/3.6A	AC220V/5.5A
	NW/GW (kg)	69/92	86/114	100/139
Accessory	Shelf	2		
Optional Accessories		Spare shelf, RS485 interface, printer, Program controller, remote control, U–disk storage		

-10℃ Cooling Incubator / BOD Incubator
Refrigerated Incubator

◎ Various constant temperature experiments and environmental tests, water analysis, microbe culture of BOD / bacteria, plant breeding, and sample preservation.

Characteristics:

- Unique internal wind circulation structure design, fan breeze circulation.
- The double door structure, with high quality glass easy to observe the samples, the outer door with magnetic strip, good sealing.
- Colour LCD display and 30-stage program temperature control,double evap-orators and automatic control intelligent defrosting to ensure long-term operating without defrost.standard independent temperature limiter,double protection for test safety.

BLT model additional characteristics:

- 5.0 inch touch display 30-stage program control , round move , ladder oper-ating.
- Sensor failure alarm,temperature curve,U-disk data storage,auto start.
- UV Lamp

Main Technical Parameters:



Patent No. : ZL 2018 3 0095051.6

Model		SPX-70BV	SPX-150BV	SPX-250BV
		SPX-70BLT	SPX-150BLT	SPX-250BLT
Cycle Mode		Forced convection		
Function	Temp. Range	-10-65℃		
	Temp. Resolution Ratio	0.1℃		
	Temp. Motion	High Temp.: ±0.5℃ Low Temp.: ±1℃		
	Temp. Uniformity	±1℃		
	Inner Chamber	Mirror Stainless Steel		
Structure	Outer Shell	Cold rolling steel electrostatic spraying exterior		
	Insulation Layer	Polyurethane		
	Heater	Stainless steel heating tube		
	Power Rating	0.8kW	1.0kW	1.2kW
	Compressor	Air cooled hermetic compressor		
	Cryogen	R134a		
	Defrost Structure	Double evaporator switching defrosting		
	Test Hole	43mm		
	Controlled External Power Supply	Universal socket (one) Built in waterproof socket (one)		
	Temp. Control Mode	BV: Color screen LCD program BLT: 5.0 inch touch screen		
	Temp. Setting Mode	Touch button setting or Touch screen type		
	Temp. Display Mode	Measuring temperature: LCD upper screen; setting temperature: LCD lower row		
	Timer	0-99.9h*30Segment		
	Operation Function	Program operation		
	Sensor	PT100		
Safety Device	Additional Funtion	BV model: LED light, Deviation correction, Menu key lock,Power failure parameter memory		
		BLT model additional character: loop self diagnosis		
		Over temperature alarm, digital temperature limiter		
Specification	Inner Chamber Size(W*L*H)(mm)	420*350*500	500*500*600	600*500*840
	Exterior Size (W*L*H)(mm)	580*610*1190	660*760*1290	760*760*1530
	Packing Size (W*L*H)(mm)	706*698*1358	856*778*1458	878*865*1698
	Volume	70L	150L	250L
	Load Per Rack	15kg		
	Shelf Number	9	12	18
	Shelf Space	35mm		
	Power Supply Current Rating	AC220V/2.3A	AC220V/3.6A	AC220V/5.5A
	NW/GW (kg)	69/92	86/114	100/139
Accessory	Shelf	2		
	Shelf Frame	4		
Optional Accessories		Spare shelf, RS485 interface, printer, remote control,U-disk storage		

Cooling Incubator/Refrigerated Incubator/
Bod Incubator

◎ Various constant temperature experiments and environmental tests at 0~65℃, water analysis, microbe culture of BOD / bacteria, plant breeding, and sample preservation.

Characteristics:

- Unique internal wind circulation structure design, breeze circulate fan make inner chamber temperature uniformity.
- Double door seal; tempered glass silicon rubber seal inner door and magnetic rubber seal outer door, which are convenient to on/off; inner chamber with light for convenient observation.
- Intelligent defrosting function ensure device long-time run without frost.
- Fluoride-free refrigeration and gentle breeze circulation.
- Test hole of ϕ 52mm at left side of container.

BX model additional characteristics:

- LCD scree 30-stage program controller,round move,ladder operating.
- Sensor failure alarm

Main Technical Parameters:



Patent No. : ZL 2018 3 0095051.6


Cycle Model		SPX-70BIII	SPX-150BIII	SPX-250BIII
		SPX-70BX	SPX-150BX	SPX-250BX
Function	Temp.Range	Forced Convection 0-65℃		
	Temp.Resolution Ratio	0.1℃		
	Temp.Motion	High Temp: ± 0.5℃ Low Temp: ± 1℃		
	Temp.Uniformity	± 1.5℃		
Structure	Inner Chamber	Mirror Stainless Steel		
	Outer Shell	Cold rolling steel electrostatic spraying exterior		
	Insulation Layer	Polyurethane		
	Heater	Stainless steel heater		
	Power Rating	0.8kW	1.0kW	1.2kW
	Compressor	Air cooled hermetic compressor		
	Cryogen	R134a		
	Defrost Structure	Automatic control intelligent defrosting		
	Test Hole	Inner diameter 43mm(one)		
	Controlled External Power Supply	Outer universal socket(one),inner waterproof socket(one)		
Control	Temp. Control Mode	BIII model:single-stage LCD Intelligent PID; BX model:30-stage LCD program		
	Temp. Setting Mode	Touch button setting		
	Temp. Display Mode	Measuring temperature:LCD upper row; Setting temperature:LCD lower row		
	Timer	BIII model:0-99.9h BX model:0-99.9h*30 segment(with timing wait function)		
	Operation Function	BIII model: fixed value operation,timing function,auto stop.		
		BX model:Program operation		
	Sensor	PT100		
	Additional Function	BIII model:LED light,Deviation correction,Menu key lock,Power failure parameter memory		
BX model:Loop self diagnosis,sensor fault alarm				
Safety Device		Over temperature alarm		
Specification	Inner Chamber Size (W*L*H)(mm)	415*350*500	490*400*750	500*515*950
	Exterior Size (W*L*H)(mm)	571*591*1051	646*641*1301	656*741*1501
	Packing Size (W*L*H) (mm)	680*676*1235	751*730*1490	761*830*1690
	Volume	70L	150L	250L
	Load Per Rack	15kg		
	Shelf Number	5	9	12
	Shelf Space	60mm		
	Supply(50/60Hz)Current Rating	AC220V/2.3A	AC220V/3.6A	AC220V/5.5A
Accessory	NW/GM(kg)	69/92	86/114	100/139
	Shelf	2		
	Shelf Frame	4		
Optional Accessories		shelf、RS485 port、printer、recorder、Remote Control、wireless messaging alarm、U-Disk data storage		

Mould Cultivation Cabinet

◎ Constant temperature experiments and environmental tests for the need for humidity.

Characteristics:

- Unique internal wind circulation structure design, breeze circulate fan make inner chamber temperature uniformity.
- LCD display 30-stage program control, round move, ladder operating, intelligent PID temperature control system, high precise temperature control PT100 sensor equipped, high precise and stability import humidity sensor component to control humidity automatically.
- Double door structure, with high quality stalinite to observe samples, outer door with magnetic strip, convenient to on and off, good sealing.
- Intelligent defrosting function ensure device long-time run without frost.
- Inner humidifying system with small particles, good humidity uniformity, low water consumption and function of alarm when is short of water.

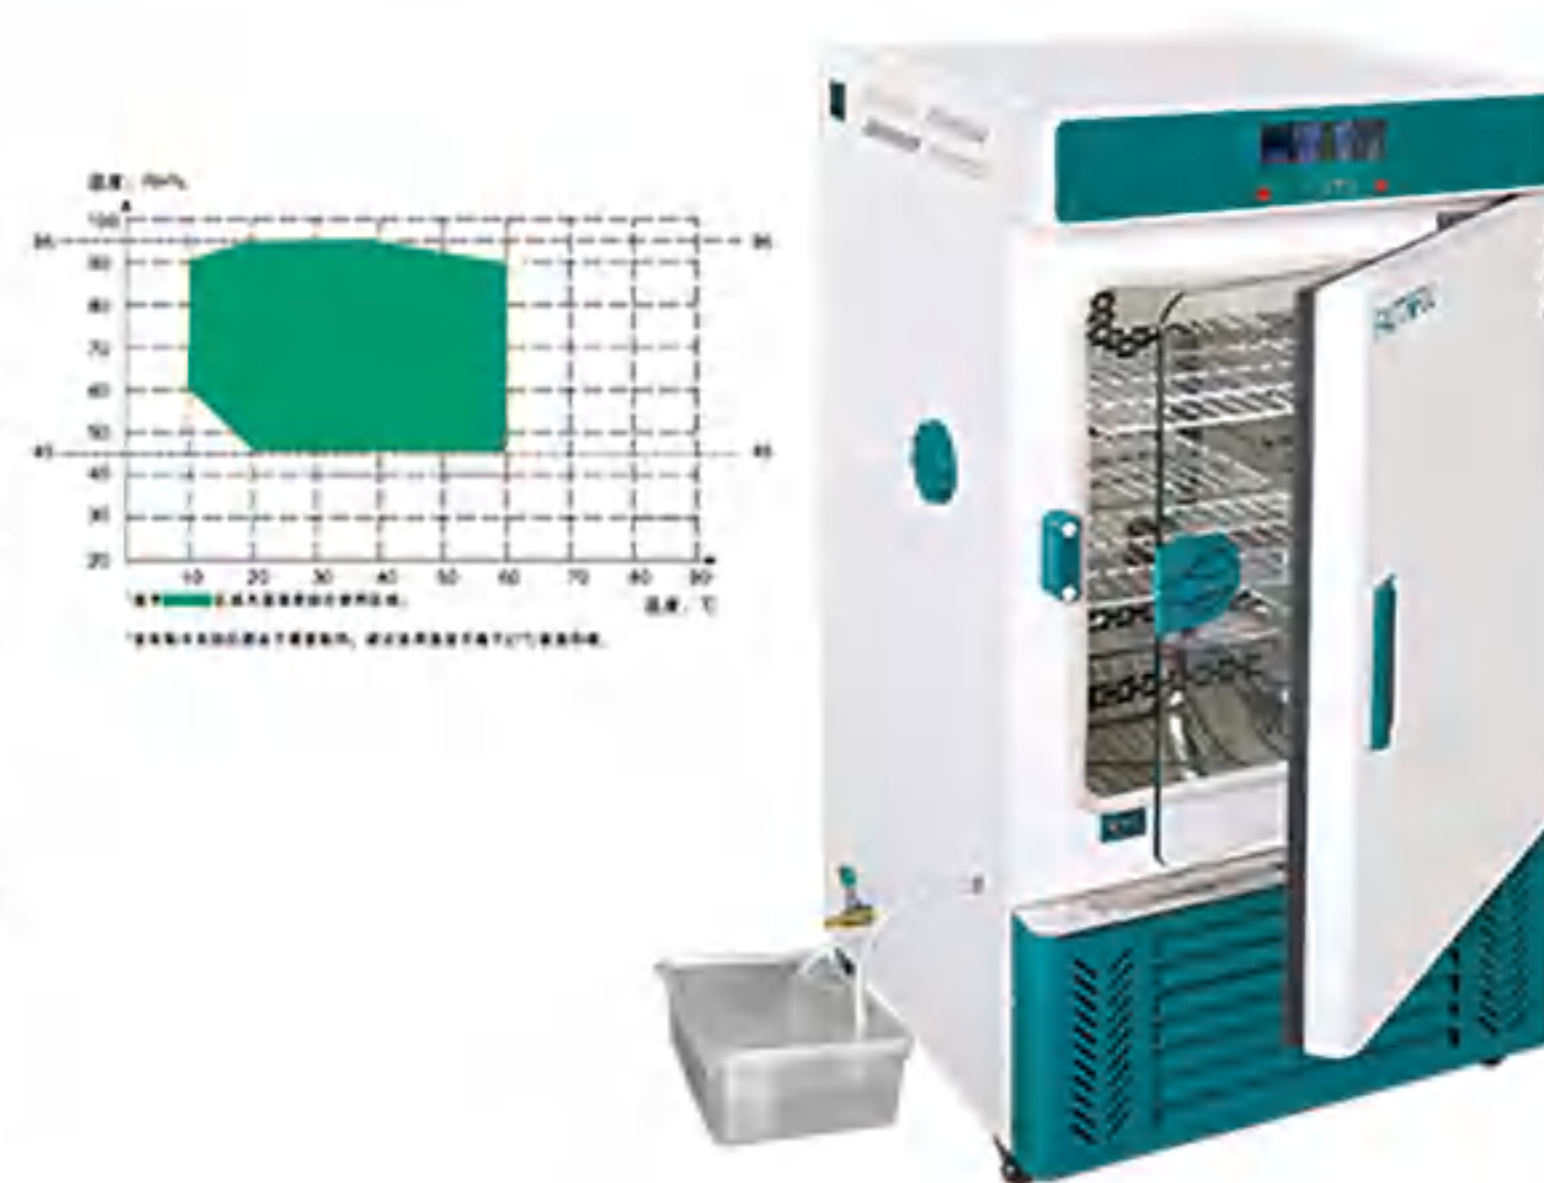

Patent No. : ZL 2018 3 0095051.6

Main Technical Parameters:

Model		MJX-70BL	MJX-150BL	MJX-250BL
Function	Cycle Mode	Forced convection		
	Temp. Range	No humidification: 0 ~ 65℃; humidification: 10 ~ 65℃		
	Temp. Resolution Ratio	0.1℃		
	Temp. Motion	High Temp.: ±0.5℃ Low Temp.: ±1℃		
	Temp. Uniformity	±1℃		
	Humidity Range	45% ~ 95%RH		
	Humidity Stability	±5%RH		
	Inner Chamber	Mirror Stainless Steel		
	Outer Shell	Cold rolling steel electrostatic spraying exterior		
	Insulation Layer	Polyurethane		
Structure	Heater	Stainless steel heater		
	Power Rating	1.8kW	2.0kW	2.2kW
	Compressor	Air cooled hermetic compressor		
	Cryogen	R134a		
	Defrost Structure	Automatic control intelligent defrosting		
	Humidifying Method	External		
	Test Hole	Plastic test hole Φ43mm		
	Sterilizing Lamp	Standard ozone-free type		
	Controlled External Power Supply	Universal socket (one)		
	Temp. Control Mode	30 Segment LCD program		
	Temp. Setting Mode	Touch button setting		
	Temp. Display Mode	Measuring temperature: LCD upper row; Setting temperature: the lower row		
	Humidity Control Mode	AUTO		
	Timer	0-99.9h*30Segment(with timing wait function)		
	Operation Function	Fixed value operation, timing function, auto stop, Program operation		
	Sensor	PT100		
	Humidity Sensor	High precision anti-condensation		
	Additional Function	Deviation correction, Menu key lock, Power failure parameter memory additional character: UV light, loop self diagnosis		
Specification	Safety Device	Over temperature alarm, over humidity alarm, water shortage alarm		
	Inner Chamber Size(W*L*H)(mm)	415*350*500	490*400*750	500*515*950
	Exterior Size (W*L*H)(mm)	571*591*1051	646*641*1301	656*741*1501
	Packing Size (W*L*H)(mm)	680*676*1235	751*730*1490	761*830*1690
	Volume	70L	150L	250L
	Load Per Rack	15kg		
	Shelf Number	5	9	12
	Shelf Space	35mm		
	Supply (50/60Hz) Current Rating	AC220V/8.2A	AC220V/9.1A	AC220V/10A
	NW/GW (kg)	69/92	86/114	100/139
Accessory	Shelf	2		
	Shelf Rack	4		
Optional Accessories		Spare shelf, Touche screen controller, RS485 interface USB interface and software, Printer, Recorder, Remote Control, U-disk storage		

Constant Temperature and Humidity Incubators

◎ Constant temperature experiment and environmental test of humidity range.

Characteristics:

- Unique internal wind circulation structure design, breeze circulate fan make inner chamber temperature uniformity.
- Large LCD display, multiple data display at the same time, 30-stage program control, round move, ladder operating, with function of loop self-diagnose and sensor fault alarm.
- Intelligent PID temperature control system, high precise temperature control PT100 sensor equipped, high precise and stability import humidity sensor component to control humidity automatically.
- Double door structure, with high quality stalinite to observe samples, outer door with magnetic strip, convenient to on and off, good sealing.
- Intelligent defrosting function ensure device long-time run without frost.
- Inner humidifying system with small particles, good humidity uniformity, low water consumption and function of alarm when is short of water.



Patent No. : ZL 2018 3 0095051.6

Main Technical Parameters:

Model		HWS-70B	HWS-150B	HWS-250B
Function	Cycle Mode	Forced convection		
	Temp. Range	No humidification: 0-65℃; humidification: 10-60℃		
	Temp. Resolution Ratio	0.1℃		
	Temp. Motion	High Temp.: ±0.5℃ Low Temp.: ±1℃		
	Temp. Uniformity	±1℃		
	Humidity Range	45%-95%RH		
	Humidity Stability	±5%RH		
	Inner Chamber	Mirror Stainless Steel		
	Outer Shell	Cold rolling steel electrostatic spraying exterior		
	Insulation Layer	Polyurethane		
Structure	Heater	Stainless steel heater		
	Power Rating	1.8kW	2.0kW	2.2kW
	Compressor	Air cooled hermetic compressor		
	Cryogen	R134a		
	Defrost Structure	Automatic control intelligent defrosting		
	Humidifying Method	Internal		
	Test Hole	Plastic test hole Φ43mm		
	Controlled External Power Supply	Universal socket (one)		
	Temp. Setting Mode	Touch button setting		
	Temp. Display Mode	Measuring temperature: LCD upper row; Setting temperature: LCD lower row		
	Humidity Control Mode	AUTO		
	Timer	0-99.9h*30Segment(with timing wait function)		
	Operation Function	Timing function, Auto stop, Program operation		
	Sensor	PT100		
	Humidity Sensor	High precision anti-condensation		
	Additional Function	LED light, deviation correction, Menu key lock, Power failure parameter memory loop self diagnosis		
	Safety Device	Over temp alarm, Over humidity alarm, Water shortage alarm		
Specification	Inner Chamber Size(W*L*H)(mm)	415*350*500	490*400*750	500*515*950
	Exterior Size (W*L*H)(mm)	571*591*1051	646*641*1301	656*741*1501
	Packing Size (W*L*H)(mm)	680*676*1235	751*730*1490	761*830*1690
	Volume	70L	150L	250L
	Load Per Rack	15kg		
	Max. Shelf Number	5	9	12
	Shelf Space	60mm		
	Supply (50/60Hz) Current Rating	AC220V/8.2A	AC220V/9.1A	AC220V/10A
	NW/GW (kg)	69/92	86/114	100/139
	Shelf	2		
Accessory		Optional Accessories		
		Spare shelf, USB Interface and software, printer, Recorder, remote control, U-disk storage		

Climate Chamber With Illumination

◎Light culture of microorganism, cell tissue, seedling, insect and small animal.

Characteristics:

- Double door structure, with high quality stalinite to observe sample.
- 7.0 inch true color touch screen display, convenient to view historical temperature data and appointment auto start and stop.
- Full spectrum 0–30000LX adjustable multiple levels, 30 sections programmed Temp. LUX and time controller.
- Full spectrum LED top light source design, high illumination, low thermal radiation, long service life, removable Light partition, adjustable layer space.
- The evaporator temperature is collectively controlled by the backflow valve and expansion valve, greatly prolonging the service life of the compressor.
- High precision digital independent temperature controller.
- Imported high quality temperature sensor and compressor.



Patent No. : ZL 2018 3 0095051.6

Main Technical Parameters:


Model		FLI250	FLI350	FLI450
Cycle Mode		Forced convection, Rear micropore. Supply air in front of the plate		
Function	Temp. Range	Without illumination: 5~65℃; With illumination: 10~65℃		
	Temp. Resolution Ratio	0.1℃		
	Temp. Motion	± 0.5℃		
	Temp. Uniformity	± 1.0℃		
	Illumination(LX)	Full spectrum 0–30000LX many degrees for adjusting		
Structure	Inner Chamber	SUS304 satinless steel sheet		
	Outer Shell	Cold rolling steel electrostatic spraying exterior		
	Thermal Insulation Material	Polyurethane		
	Light barrier	Standard four layer full spectrum LED lamp board		
	Heater	Stainless steel heating tube		
	Power Rating	2.0kw	2.2kw	2.5kw
	Compressor	Imported air-cooled sealed compressor		
	Coolant	R134A		
Controller	Defrosting Structure	Automatic		
	Leading wire hole	The outer diameter of standard inflation port interface is 10mm		
	Temp. control mode	30 segment program		
	Temp. setting mode	Touch screen settings		
	Temp. display mode	7.0 inch true color touch screen display		
	Operation function	Fixed temperautre operation,timing function,auto stop. Appointment start. Program Operature		
	Program pattern	Standard configuration		
	Sensor	PT100		
Specification	Additional fuction	Make an appointment to switch on and off, query the historical temperature data curve, store and export the U disk data, correct the deviation, lock the menu key, power failure compensation, power failure memory, circuit self diagnosis and intelligent defrosting		
	Safety device	Over temperature will automatically cut off the heating, long-term under temperautre cut off the refrigeration system,protect the sample; loop self diagnosis		
	Inner Chamber size(W*L*H)(mm)	600*500*840	630*580*960	630*670*1100
	Exterior size (W*L*H)(mm)	794*726*1600	824*806*1720	824*896*1860
	Packing size (W*L*H)(mm)	893*863*1850	943*923*1960	923*1033*2110
	Volume	250L	350L	450L
	Load per rack	15kg		
	Shelf space	120mm		
Accessory	Supply (50/60Hz) Current rating	AC220V/4.5A	AC220V/5.0A	AC220V/5.5A
	NW/GW (kg)	220/250	250/290	300/340
	Shelf	4		
	Shelf plate	8		
Optional accessories		Light barrier, USB interface and upper computer software, printer, wireless SMS alarm, co2 concentration control		

Climate Chamber with Humidity Control
Plant Growth Chamber

◎Light culture of microorganism, cell tissue, seedling, insect and small animal under the control of precise humidity.

Characteristics:

- Double door structure, with high quality stalinite to observe sample.
- 7.0 inch true color touch screen display, convenient to view historical temperature data and appointment auto start and stop.
- Full spectrum Multi-stage adjustable, 30 sections programmed Temp. LUX ,RH controller.
- Full spectrum LED top light source design, high illumination, low thermal radiation, long service life, removable Light partition, adjustable layer space.
- Internal humidification system. Small humidifier particles, high humidity uniformity, small water consumption, with automatic water intake, water shortage alarm function.
- The evaporator temperature is collectively controlled by the backflow valve and expansion valve, greatly prolonging the service life of the compressor.
- Imported high quality temperature sensor and compressor.

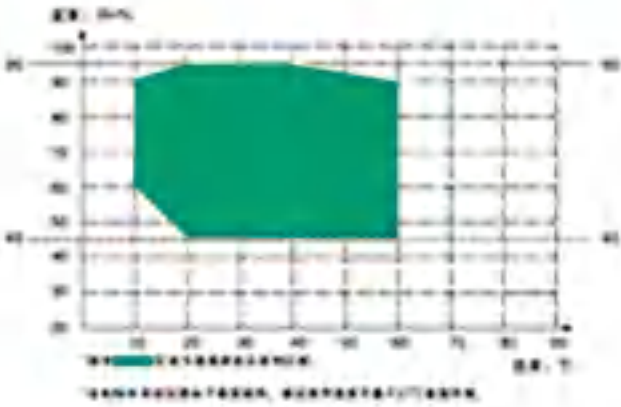

Patent No. : ZL 2018 3 0095051.6

Main Technical Parameters:

Model		FPG250	FPG350	FPG450
Cycle Mode		Forced convection, Rear micropore. Supply air in front of the plate		
Function	Temp. Range	Without illumination: 5~65℃; With illumination: 10~65℃		
	Temp. Resolution Ratio	0.1℃		
	Temp.Motion	± 0.5℃		
	Temp. Uniformity	± 1.0℃		
	illumination(LX)	Full spectrum 0–30000LX many degrees for adjusting		
Structure	Humidity Range	40% ~ 95% RH		
	Humidity Motion	± 5% RH		
	Inner Chamber	SUS304 satinless steel sheet		
	Outer Shell	Cold rolling steel electrostatic spraying exterior		
	Thermal Insulation Material	Polyurethane		
	Light barrier	Standard four layer full spectrum LED lamp board		
	Heater	Stainless steel heating tube		
	Power Rating	2.0kw	2.2kw	2.5kw
Controller	Compressor	Imported air-cooled sealed compressor		
	Coolant	R134A		
	Defrosting Structure	Automatic		
	Humidity control mode	Automatic		
	Leading wire hole	The outer diameter of standard inflation port interface is 10mm		
	Temp. control mode	30 sections program		
	Temp. setting mode	Touch screen settings		
	Temp. display mode	7.0 inch true color touch screen display		
Specification	Operation function	Fixed temperature operation,timing function,auto stop. Appointment start, Program operation		
	Program pattern	Standard configuration		
	Sensor	PT100 Temp.Sensor,Imported chip humidity sensor		
	Additional fuction	Appointment start/off, Historical temperature and humidity data curve query, U-disk data storage and export, deviation correction, Menu key locking, power failure compensation, power failure memory, loop self diagnosis, intelligent defrosting		
Safety device		Over temperature will automatically cut off the heating, long-term under temperature cut of the refrigeration systemp, protect the sample; loop self diagnosis		
Accessory	Inner Chamber size(W*L*H)(mm)	600*500*840	630*580*960	630*670*1100
	Exterior size (W*L*H)(mm)	794*726*1600	824*806*1720	824*896*1860
	Packing size (W*L*H)(mm)	893*863*1850	943*923*1960	923*1033*2110
	Volume	250L	350L	450L
	Load per rack	15kg		
	Shelf space	120mm		
	Supply (50/60Hz) Current rating	AC220V/4.5A	AC220V/5.0A	AC220V/5.5A
	NW/GW (kg)	225/255	260/300	310/350
Optional accessories	Shelf	4		
	Shelf plate	8		
Optional accessories		Light barrier, USB interface and upper computer software, printer, wireless SMS alarm, CO2 concentration control		

Semiconductor Refrigeration Incubator /Peltier Incubator

Semiconductor refrigeration low temperature incubator uses Peltier (semiconductor) refrigeration technology to achieve low temperature control of the incubator, which has the advantages of energy saving, environmental protection and high efficiency, and has heating and cooling functions. It is an ideal constant temperature equipment for the cultivation of bacteria, mold and other microorganisms in a low temperature environment, as well as sample preservation, plant cultivation, plant breeding and other tests. Widely used in environmental protection, health and epidemic prevention, drug testing, agriculture and livestock, aquatic products, universities, research institutes and other fields of major laboratories.

Characteristics:

- LCD color screen, PID control technology, temperature is accurate and stable;
- It has a glass inner door, which is convenient for experimental observation. At the same time, the chamber behind the glass door is equipped with a door control switch, and the switch is linked with the control system;
- The new semiconductor refrigeration system ensures the long-term stable operation of the refrigeration system;
- Stacking foot design. The machine can be stacked to save space, which can improve usage efficiency (same specification).



Main Technical Parameters:

Model		FPI-45	FPI-70
Cycle Mode		Forced Convection	
Function	Temp.Range	20℃~65℃	
	Temp.Resolution Radio	0.1℃	
	Temp.Motion	± 0.5℃	
	Temp.Uniformity	± 0.5℃(37℃)	
Structure	Inner Chamber	Mirror Stainless Steel	
	Outer Shell	Cold rolling steel electrostatic spraying exterior	
	Insulation Layer	Polyurethane	
	Heater	Heating Element	
	Refrigerator	Semiconductor Chilling Plate	
Controller	Power Rating	0.35kW	0.5kW
	Temp.Control Mode	Intelligent PID	
	Temp.Setting Mode	Touch button setting	
	Temp.Display Mode	Display on LCD	
	Timer	0-9999min(with timing wait function)	
	Operation Function	Fixed temperature operation, fixed timing operation, auto stop.	
	Additional Function	Sensor deviation correction, temperature overshoot self-tuning, internal parameter locking. power-off parameter memory	
	Sensor	PT100	
Safety Device		Over temperature sound-light alarm	
Specification	Inner Chamber Size(W*L*H)(mm)	330*320*430	415*350*500
	Exterior Size(W*L*H)(mm)	415*445*758	500*475*828
	Packing Size(W*L*H)(mm)	535*565*933	620*595*1003
	Volume	45L	70L
	Current Rating(50/60HZ)	AC220V/1.6A	AC220V/2.3A
	NW/GW(KG)	20/25	35/45
Optional Accessories			

Vertical constant temperature shaker (LCD)

Characteristics:

- Imported compressors, imported bearings, servo motors.
- Air duct design, not direct blowing, good temperature uniformity.
- The minimum speed is 10rpm, it can start and stop at ultra-low speed to protect the sample.
- Make an appointment to start the function.
- Solenoid valve defrost function can ensure long-term low temperature operation.
- Can be set to run forward, reverse, and alternately run.



Main Technical Parameters:

Name	Vertical constant temperature shaker (LCD)					
Model	FSI-175	FSI-175C	FSI-335	FSI-335C	FSI-580	FSI-580C
Control Mode	PID microcomputer processing chip					
Cycle Mode	Forced convection					
Shaking Mode	Convolution					
Display Mode	LCD liquid crystal display					
Drive Mode	Multidimensional drive					
	3 Axes				4 Axes	
USB data download system	Yes (optional)					
Control System	(Standard mode; continuous mode; programmable mode (multi-stage temperature, speed, time control))					
Rotary Speed Range (rpm)	0, 20-350 (Can do static training, forward and reverse)				0, 20-280 (Can do static training, forward and reverse)	
Rotary Accuracy (rpm)	± 1					
Amplitude (mm)	Φ26 (customizable Φ35 (20-250rpm/min)、Φ50 (20-2000rpm/min)					
Max Capacity (clamp)	100ml*60 or 250ml*38 or 250ml*22 or 1L*16		100ml*100 or 250ml*56 or 500ml*44 or 1L*24		250ml*90 or 500ml*72 or 1000ml*42	
Max Capacity (stick mat)	100ml*60 or 250ml*36 or 500ml*24 or 1L*16		100ml*120 or 250ml*70 or 500ml*44 or 1L*24		250ml*112 or 500ml*76 or 1000ml*42	
Standard configuration	250ml*24		250ml*28 500ml*22		250ml*45 500ml*36	
Plate Size (mm)	500*360		710*455		950*550	
Timer Range (h/min)	0-9999 (with timing function,continuous operating)					
Temperature Range (℃)	Ambient temperature+5-65	4-65 (25℃)	Ambient temperature+5-65	4-65 (25℃)	Ambient temperature+5-65	4-65 (25℃)
Temperature Accuracy (℃)	± 0.1					
Temperature Uniformity (℃)	± 0.5 (37℃,Effective Working Area)					
Temperature Motion (℃)	≤0.1 (37℃)					
Tray Quantity	(2 pieces)					
External Size (mm)	700*580*1280		950*700*1280		1200*800*1630	
Capacity (L)	175		335		580	
Power (W)	600	850	900	1150	1100	1400
Power Supply	AC220 ± 10% 50-60HZ					
Ambient Temperature (℃)	5-30					
Additional Function	Ultra-low start, adjustable start speed, automatic overspeed protection, watchdog timer, parameter memory, call recovery, refrigeration unit overload protection and call delay start, automatic defrost, upper and lower limit over temperature sound and light alarm, automatic stop when the door is opened (optional), with lighting, ultraviolet disinfection function (optional), setting parameter view, monitoring temperature and correction of ambient temperature. Touch screen (optional)					

Desktop Constant Temperature Shaker(LCD)

Characteristics:

- Ultra-low speed start, auto-lock when speed out of control, adjustable start-up speed .
- Multi-stage speed, temperature and time control system. Can set different speed, temperature and time in one time, automatic change operating mode during working.
- Silent fan design, forced air convection mode and unique air circulation structure, ensure good temperature uniformity.
- Automatic refrigerating mode, environmental friendly cryogen, automatic control for refrigerating system on and off based on ambient temperature.
- Intelligent refrigerate without frost, automatic defrosting function, can set time and interval time for defrosting, ensure machine in stable operation under low temperature. With refrigerating delay start-up function to protect compressor.
- Three rotation mode for chose positive rotation inversion reciprocal and mutual conversion.
- LCD display temperature, time and speed on same screen.
- With fault self-diagnosis, indicating fault location and fault code, to help find problem and solve problem .
- High precision speed control PID feedback control, avoid damage from long time motor working at low speed causing motor under over heating.
- Equipped with servo motor, control speed accuracy, high and low speed performance.
- Selected imported compressors meet the international environmental protection requirements, safe fluorine free refrigeration, and low noise.
- With ultraviolet disinfection (including air duct disinfection) and lighting functions.



Main Technical Parameters:

Desktop Constant Temperature Shaker(LCD)		
Name	FSI-70	
Model	FSI-70	FSI-70C
Control Mode	PID Microcomputer Processing Chip	
Cycle Mode	Forced Air Convection	
Oscillation Mode	Cyclotron Oscillation	
Display Mode	LCD Display	
Drive Mode	Single-Dimensional Drive	
USB Data Download System	Yes (optional)	
Control System	Standard Mode;Continuous Mode;Programable Mode(multi-stage temperature,speed and time control)	
Rotary Speed Range (rpm)	0, 20-450 (Static Cultivate, Positive And Negative Rotation)	
Rotary Accuracy (rpm)	± 1	
Amplitude (mm)	Φ26	
Max Capacity (clamp)	100ml x 23 or 250ml x 15 or 500ml x 9 or 1000ml x 6 or 2000ml x 4	
Max Capacity (stick mat)	100ml x 30 or 250ml x 20 or 500ml x 9 or 1L x 8 or 2L x 4	
Standard Configuration	500ml x 3 250ml x 3 100ml x 4 50ml x 4	
Plate Size (mm)	450 x 410	
Timer Range (h/min)	0-9999 (with timing function,continuous operating)	
Temperature Range (°C)	Temperature Range+5-65	4-65 (25℃)
Temperature Accuracy (°C)	± 0.1	
Temperature Uniformity (°C)	± 0.5 (37℃, Effective Working Area)	
Temperature Motion (°C)	≤0.1 (37℃)	
Tray Number	1 piece	
External Size (mm)	750 x 710 x 520	
Capacity (L)	70	
Power (W)	550	650
Power Supply	AC220 ± 10% 50-60HZ	
Ambient Temperature (°C)	5-30	
Additional Function	Ultra-low speed start, adjustable start speed, automatic over speed protection, timer monitor,parameter memory,electricity incoming recovery, refrigeration unit overload protection and electricity incoming delay start, automatic defrozing,upper and lower limits over temperature acoustooptical alarm, automatic stop by door opened (optional),LED light, UV sterilizing function (optional), parameter setting for viewing, calibration for monitor temperature and ambient temperature.	

Multifunctional Water Baths Shaker

Low noise and steady reciprocating oscillating water bath cultivation equipment.

Characteristics:

- Large-screen background LCD, shows the measured value, set value and the setting time and the remaining time.
- High-precision temperature control. resume operation automatically if power off unexpectedly.
- High-precision speed control: PID feedback control, motor speed stable and accurate. the precision ± 1rpm slow start design, automatically locked after speed out of control, adjustable start speed prevent splashing of shaking bottle liquid.
- Tube rack and water bath flask seat for standard configuration, with function of water bath.



Patent No. : ZL 2018 3 0095051.6

Main Technical Parameters:

Model		FWS-30
Mode		Reciprocating oscillation + thermostatic water bath
Function	Operating Temp Range	RT-100℃
	Tem. Rasolution Ratio	0.1℃
	Tem. Motion	± 0.1℃
	Tem. Uniformity	± 0.2℃
	Reciprocal Oscillation Amplitude	16 or 24mm (Ex-factory is 16mm)
	Reciprocating Frequency Range	20 ~ 180 (r/min)
Structure	Reciprocating Frequency Accuracy	± 1rpm
	Water Tank	Mirror stainless steel
	Outer Shell	Cold rolling steel electrostatic spraying exterior
	Upper Cover	Mirror stainless steel
	Insulating Layer	Polyurethane
	Heater	Stainless steel electric heater tube
Controller	Driving Mode	Crankshaft+ double link + four wheels
	Shelf	Mirror stainless steel
	Power Rating	1.5kW
	Tem. Control Mode	LCD PID Intelligent control
	Reciprocating Control Mode	
	Setting Mode	Touch button setting
Specification	Tem. Display Mode	LCD Display
	Speed Display Mode	
	Timer	0 ~ 9999 min
	Operation Function	Fixed value operation, timing function, auto stop, quickly stop start
	Temperature Sensor	PT100
	Speed Sensor	Hoare
Additional Function		Deviation correction, menu keys locked, power-off memory
Safety Device		Over temperature alarm, menu locked, water full or shortage protection, Motor shaft lock protection;
Accessories	Water Tank Size (W*L*H)(mm)	500*310*200
	Exterior Size (W*L*H)(mm)	828*360*425
	Packing Size (W*L*H)(mm)	912*480*605
	Spring Shock Basket Size (mm)	395*250
	Shock Basket Largest Single Size (ml /piece)	100ml*12/250*8/500*6
	Inside Volume	31L
	Shock Basket Bearing	5kg/layer
	Current Rating (50Hz)	AC220V/6.8A
	NW/GW (kg)	20/30
Accessories		Water bath flask seat, tube rack, Customized Flask Clip Tray(Optional)

Constant Temperature Shaking Incubator

◎ Small desktop constant temperature shaking culture equipment.

Characteristics:

- Large-screen LCD, can be continuous, accurate, real-time shows temperature, speed, working time. menu operation interface, easy to operate.
- Microcomputer control temperature and oscillation frequency with timing functions, built-in power-off protection can automatically resume operation after power on.
- Unique air duct breeze circulation, with better temperature uniformity; large observation window, Easy to observe sample, easy to be opened and closed
- Speed control : intelligent brushless DC motor, high speed accuracy, slow start design, auto lock if speed out of control. adjustable starting speed to prevent the splash of shake flask liquid.
- With function of cutting off UV lamp by open door.
- Studio at the bottom waterproof, Spills will not affect the normal operation of the machine.



Patent No. : ZL 2018 3 0095051.6

Main Technical Parameters:

Model		FS-50B	FS-70B
Shaking Mode		Cyclotron Oscillation	
Function	Amplitude	Φ20mm	
	Temp. Resolution	0.1℃	
	Temp. Motion	± 0.1℃	
	Temp. Uniformity	± 1℃	
	Temp. Range	RT+5 ~ 65℃	4 ~ 65℃ (25℃)
	Rotary Speed	30 ~ 300rpm	30 ~ 300rpm
Structure	Rotary Speed Precision	± 1rpm	
	Chamber Material	Mirror Stainless Steel	
	Outer Shell	ABS	
	Observation Window Material	Imported resin	
	Thermal Insulation Material	Polyurethane	
	Cooling System	No	Yes
	Coolant	No	R134a
	Heater	Stainless steel heating tube	
	Drive Mode	Three-axis level	
	Standard Tray Style	Universal spring grid tray	
	Air Circulation Mode	Horizontal convection	
	Power Rating	0.6kW	0.8kW
Controller	Temp. Control Mode	LCD PID intelligent control	
	Cyclotron Control Mode	Automatic changes of rotation direction	
	Setting Mode	Touch button setting	
	Temp. Display Mode	LCD display	
	Speed Display Mode	0 ~ 9999min	
	Timer	Fixed value operation、timing function、bidirectional automatic switchover、auto stop、quick stop start	
	Operation Function	PT100	
	Temperature Sensor	Hoare	
	Speed Sensor	Yes	
	Gating System	Deviation correction, menu keys locked, power-off memory	
Specification	Additional Function	over temperature alarm, menu locked, gating system, power-off protection, plugging turn protection	
	Safety Device		
	Inner Chamber Size (W*L*H)(mm)	455*380*290	560*390*320
	Exterior Size (W*L*H)(mm)	500*640*480	600*770*500
	Packing Size (W*L*H)(mm)	802*620*685	913*720*698
	Shelf Size (mm)	380*320	480*315
	Max capacity of Shelf for single specification(ml/pc)	100ml*16/250ml*9/500ml*5/1000ml*4	100ml*24/250ml*12/500ml*8/1000ml*6
	Inside Volume	50L	70L
	Shelf Load Bearing	≤10kg/layer	≤15kg/layer
	Shelf Layer	1	
	Power Supply (50/60Hz) Current Rating	AC220V/2.5A	AC220V/3.5A
	NW/GW (kg)	45/55	65/85
	Optional Flask Clip Tray Wireless Short Message Alarm System	100ml*16/250ml*9/500ml*5/1000ml*4	100ml*24/250ml*12/500ml*6/1000ml*6

Orbital shaker

◎ Experiment of sample shake in solution, fixation of electrophoretic gel separate band, oscillate shaking of coomassie blue dyeing and decolorization, Immobilization, staining and development of silver nitrate.

Characteristics:

- Temperature setting, measuring, and running state show on one large LCD screen, with rotary encoder switch.
- The operating parameters can be remembered and protected. automatically resume operation if the power supply cut off.
- Speed control : intelligent brushless DC motor, high speed accuracy, slow start design, auto lock if speed out of control. adjustable starting speed to prevent the splash of shake flask liquid.



Main Technical Parameters:

Model		FBS-O10	FBS-O20
Shaking Mode		Cyclotron oscillation	
Function	Amplitude	φ 10mm	φ 20mm
	Rotary Speed Range	100~500rpm	30~250rpm
	Rotary Speed Precision	± 1rpm	
Structure	Out Shell	ABS	
	Motor Type	Brushless motor	
	Tray	Anodizing Alluminum	
	Driving Mode	Four horizontal points	
	Power Rating	0.03kW	
Controller	Cyclotron Control Mode	LCD, PID intelligent control	
	Cyclotron Setting Mode	Rotary coding switch	
	Speed display Mode	LCD display	
	Timer	0 ~ 9999 min (with timing function)	
	Operation Function	Fixed value operation、timing function、bidirectional automatic switchover、auto stop、quick stop start	
	Speed Sensor	Hoare	
Specification	Additional Funtion	Deviation calibration, power-off memory	
	Safety Device		Intelligent low speed start, blocking protection
	Exterior Size (W*L*H)(mm)	365*450*222	
	Packing Size (W*L*H)(mm)	470*550*325	
	Tray Size (mm)	320*320	
	Load Per Tray	≤5kg	
	Tray Number	1	
	Supply (50/60Hz) Current Rating	AC220V/0.14A	
	NW/GW (kg)	10/15	
	Optional Type		Universal spring grid tray Flask Clip Tray 250ml*9/500ml*4

1200°C Ceramic Fiber Muffle Furnace

◎ Sintering, melting, elemental analysis and physical measurement within 1200°C of precise control.

Characteristics:

- Mirror stainless steel mouth, long-term use will not change color.
- Imported double insulated ceramic liner, stable performance.
- Vacuum forming polycrystalline mullite fiber furnace, high efficiency insulation.
- In the double shell, the air sleeve is insulated, and the double guiding air passage.
- High-precision micro-computer controller and precision sensor are perfectly integrated, and the temperature is accurate.

SX4 model also has the following characteristics:

- Import time control system and high precise sensor with sensitive response, high precision and good stability.
- Adding exhaust devices is beneficial to ashing.
- Split design, circuit detachable, easy to maintenance and repair.
- P model is program temperature control type. program temperature controller can programme multistage program, Simplifies the experimental process and realizes automatic control and operation.



Patent No. : ZL 2015 3 0282033.5

Main Technical Parameters:

Model		SX3-2.5-12		SX3-5-12		SX3-8-12		SX3-10-12		SX3-36-12	
		SX3-2.5-12B		SX3-5-12B		SX3-8-12B		SX3-10-12B		SX3-36-12	
		SX4-2-12		SX4-7-12		SX4-12-12		SX4-16-12		SX4-36-12	
		SX4-2-12B		SX4-7-12B		SX4-12-12B		SX4-16-12B		SX4-36-12	
		SX4-2-12P		SX4-7-12P		SX4-12-12P		SX4-16-12P		SX4-36-12P	
		SX4-2-12PB		SX4-7-12PB		SX4-12-12PB		SX4-16-12PB		SX4-36-12P	
Heating Mode		Alloy wire heating in three sides left; right; top side.									
Function	Temp. Range	100-1200℃									
	Temp. Resolution Ratio	1℃									
	Temp. motion	± 1℃									
	Temp.Rising time to max temp	≤30min									
Structure	Chamber material	Ceramic fiber									
	Outer shell	Without B: Cold rolling steel electrostatic spraying exterior; B type: SUS 304 Embossed stainless steel									
	Insulation layer	Ceramic fiber									
	Heater	Alloy heating wire									
	Power rating	1.5kw	3.0kw	4.5kw	6.0kw	9.0kw					
	Exhaust hole	φ 30mm(chimney size 80*60mm)									
Controller	Temp. control mode	SX3 Type : domestic Xianmen Yudian single-stage temperature controller SX4 Type:Japaness conduction single-stage temperature controller SX4-P:Japaness Fuji color LCD 64- segment programmed temperature controller									
	Temp. setting mode	Touch button setting									
	Temp. display mode	Measuring temperature: the upper row, setting temperature: the lower row									
	Timer	Without P: No Timing Function; SX4-P: 0-99 hours and 59 minutes(with Timing Waiting Function) SX3: 00-3200min									
	Operation function	Fixed temperature operation, timing function, auto stop.									
	Additional function	Sensor deviation correction, Temperature overshoot self-tuning, Internal parameter locked, Power-off parameter memory									
	Sensor	High precision K-type sensor									
Safety device		Manual door security lock, over temperature sound-light alarm, door opening electrical outage, over-temperature protection , thermocouple failure									
Specification	Inner Chamber size(W*L*H)(mm)	120*200*80	200*300*120	200*300*200	250*400*160	300*400*300					
	Exterior size (W*L*H)(mm)	450*685*600	530*785*640	530*785*720	600*895*700	630*885*820					
	Packing size (W*L*H)(mm)	570*770*740	650*870*780	655*875*865	720*980*845	750*970*965					
	Volume	2L	7L	12L	16L	36L					
	Current rating (50/60HZ)	AC220V/6.6A	AC220V/13.6A	AC220V/20.4A	AC380V/9.9A	AC380V/13.6A					
	NW/GW (kg)	33/37	45/50	62/68	77/96	87/106					
Optional type		Air port, USB interface, 5.0inch ture color screen, programmable controller with USB date storage function									

1600°C Ceramic Fiber Muffle Furnace

◎ It is used for sintering, melting and analyzing metal, nonmetal and other compound materials in laboratories of universities, research institutes and industrial and mining enterprises.

Characteristics:

- Mirror stainless steel furnace mouth, long-term use will not change color.
- Vacuum-forming polycrystalline mullite fiber furnace, high efficiency insulation.
- Double shell, the air sleeve heat insulation, and double air guiding passage.
- High-purity silicon-molybdenum rod heating, and with standard exhaust chimney.
- High precision program controller, with imported sensor and imported voltage regulating module.
- With leakage protection, thermocouple failure, door opening electrical outage, over-temperature protection and sound-light alarm safety device.
- Lockable handle, quick detachable structure, easy to maintenance and repair.
- Standard with insulated gloves, crucible tongs and Alumina load bearing board.



Main Technical Parameters:

Model	30 segment Domestic controller 64 Segment Import Controller (Model With P) 80 Segment 7.0 Inch Touch Screen controller (Model With PL)	SX4-2-16	SX4-4-16	SX4-8-16	SX4-12-16	SX4-20-16	SX4-36-16
		SX4-2-16P	SX4-4-16P	SX4-8-16P	SX4-12-16P	SX4-20-16P	SX4-36-16P
Function	Temp. Range	Max 1600°C (Long time continuous working temperature 1500°C)					
	Temp. Accuracy	± 1°C					
	Temp. Resolution Ratio	1°C					
	Temp. RISING Time To Max Temp	≤ 130min					
Structure	Furnace Body	Polycrystalline Mullite Fiber					
	Outer Shell	Cold rolling steel with electrostatic Spraying exterior					
	Chamber Size	150*90*150	150*150*150	300*150*150	300*200*200	300*260*260	300*400*300
	Exhaust Hole	OD φ 22, ID φ 18					
	Heater	Silicon Molybdenum Rod					
	Heating Power	3KW	5.5KW	9KW	10KW	12KW	15KW
Controller	Temp. Control	No Letter Model : LED Programmed Controller; P Type: LCD Imported Programmed Controller; PL Type: 7.0-inch touch screen program controller, with curve viewing and USB data storage functions.					
	Temp. Control Mode	Intelligent Microcomputer PID Control					
	Display Mode	No Letter Model: 4 keys Settings P Type: 5 keys Settings PL Type: Touch Type Operation					
	Timer	No Letter Model: 0-9999min P Type: 0-99 hour 59min PL Type: 0-9999min					
	Operation Function	Constant Value Operation Or Program Operation					
	Sensor	S-type Thermocouple					
	Additional Function	Heating Start Stop Button, Sensor Fault Alarm, Temperature Overshoot Self Setting, Temperature Correction					
	Safety Device	Overtemperature Alarm, Leakage Protection, Door Opening Heating					
Specification	Exterior Size (W*L*H)(mm)	600*755*1100	600*815*1100	750*815*1100	750*865*1150	750*925*1210	750*1065*1250
	Packing Size (W*L*H)(mm)	760*925*1310	760*985*1310	910*985*1310	910*1045*1360	910*1105*1420	910*1265*1460
	Volume	2L	4L	8L	12L	20L	36L
	Current Rating (50/60HZ)	AC220V 50Hz		AC220V/AC380V		AC380V 50Hz	
	Nw/Gw (kg)	70/90	80/100	110/130	150/170	175/195	270/320
	Optional Type	485 Communication ,U Disk Data Storage					

1700°C Ceramic Fiber Muffle Furnace

It is used for sintering, melting and analyzing metal, nonmetal and other compound materials in laboratories of universities, research institutes and industrial and mining enterprises.

Characteristics:

- Mirror stainless steel furnace mouth, long-term use will not change color.
- Vacuum-forming polycrystalline mullite fiber furnace, high efficiency insulation.
- Double shell, the air sleeve heat insulation, and double air guiding passage .
- High-purity silicon-molybdenum rod heating, and with standard exhaust chimney.
- High precision program controller, with imported sensor and imported voltage regulating module.
- With leakage protection, thermocouple failure, door opening electrical outage, over-temperature protection and sound-light alarm safety device.
- Lockable handle, quick detachable structure,easy to maintenance and repair.
- Standard with insulated gloves, crucible tongs and Alumina load bearing board.



Main Technical Parameters:

Model	30 segment Domestic controller	SX4-2-17	SX4-4-17	SX4-8-17	SX4-12-17	SX4-20-17	SX4-36-17
	64 Segment Import Controller (Model With P)	SX4-2-17P	SX4-4-17P	SX4-8-17P	SX4-12-17P	SX4-20-17P	SX4-36-17P
	30 Segment 7.0 Inch Touch Screen controller(Model With PL)	SX4-2-17PL	SX4-4-17PL	SX4-8-17PL	SX4-12-17PL	SX4-20-17PL	SX4-36-17PL
Function	Temp. Range	Max 1700℃(Long time continuous working temperature 1650℃)					
	Temp. Accuracy	± 1℃					
	Temp. Resolution Ratio	1℃					
	Temp. RISING Time To Max Temp	≤140min					
Structure	Furnace Body	HHR Polycrystalline Mullite Fiber					
	Outer Shell	Cold rolling steel with electrostatic Spraying exterior					
	Chamber Size	150*90*150	150*150*150	300*150*150	300*200*200	300*260*260	300*400*300
	Exhaust Hole	Di φ 22, De φ 18					
	Heater	Silicon Molybdenum Rod					
Controller	Heating Power	3KW	5.5KW	9KW	10KW	12KW	15KW
	Temp. Control	No Letter Model : LED Programmed Controller; P Type: LCD Imported Programmed Controller; PL Type: 7.0-inch touch screen program controller, with curve viewing and USB data storage functions.					
	Temp. Control Mode	Intelligent Microcomputer PID Control					
	Display Mode	No Letter Model: 4 keysSettings P Type: 5 keys Settings PLType: Touch Type Operation					
	Timer	No Letter Model: 0-9999min P Type: 0-99 hour 59min PL Type: 0-9999min					
	Operation Function	Constant Value Operation Or Program Operation					
	Sensor	B-type					
	Additional Function	Heating Start Stop Button, Sensor Fault Aarm, Temperature Overshoot Self Setting, Temperature Correction					
	Safety Device	Overtemperature Alarm, Leakage Protection, Door Opening Heating					
Specification	Exterior Size (W*L*H)(mm)	600*755*1100	600*815*1100	750*815*1100	750*865*1150	750*925*1210	750*1065*1250
	Packing Size (W*L*H)(mm)	760*925*1310	760*985*1310	910*985*1310	910*1045*1360	910*1105*1420	910*1265*1460
	Volume	2L	4L	8L	12L	20L	36L
	Curent Rating (50/60Hz)	AC220V 50Hz			AC380V 50Hz		
	Nw/Gw (kg)	70/90	80/100	110/130	150/170	175/195	270/320
	Optional Type	485 Communication ,U Disk Data Storage					

New Laminar Flow Cabinet

Vertical flow, airflow direction in the work space down from top to bottom.

Characteristics:

- Vertical manifold and quasi-closed 304 stainless steel table surface can effectively prevent external gas penetration into the operating clean area.
- Centrifugal fan, stable speed, low noise, light touch air volume control system, five-stage wind speed control, speed 0.2-0.6m/s adjustable, (initial: 0.6m/s; Final: 0.2m/s).
- High quality air filter without partition, good purification effect.
- LCD color screen controller (with sterilization timer, built-in socket instrument controllable switch, front window status display, can set three interlock , cumulative work timing, remote control).
- CJ-1DIII,CJ-2DIII, CJ-1SIII,CJ-2SIII:wind speed sensor.
- Automatic cutting off UV lamp function by opening glass.



Main Technical Parameters:


Model		CJ-1D II	CJ-1S II	CJ-2D II	CJ-2S II
		CJ-1D III	CJ-1S III	CJ-2D III	CJ-2S III
Applicable Station		one person one side	one operator two side	two person one side	two person two side
Airflow Direction		Vertical			
Function	Cleanliness	Class 100			
	Collection Efficiency	0.3um partical ≥99.995%			
	Colony count	≤0.5/Vessel (petri dish is φ 90mm)			
	Wind Speed	initial: 0.6; final: 0.2 (m/s)			
	Wind Speed Range	0.2-0.6 (m/s)			
	Noise Level	≤62db			
	Vibration Semi-peak Value	≤3um			
	Illumination Lntensity	≥500LX (Activity Center			
	Work Surface	50kg			
Composition	Inner Chamber	SUS304 Stainless steel plate			
	Outer Shell	Cold rolling steel electrostatic spraying exterior			
	Operation Door	Tempered Glass			
	HEPA filter (mm)	900*640*50 one piece		1300*640*50 one piece	
	Pre-Filter	464*360*5 one piece		712*360*5 one piece	
	Fluorescent Lamp	16W*2		24W*2	
	UV Lamp	20W*1		30W*1	
	Top Fan	180W one piece		180W two pieces	
	Rated Power	240W		440W	
Controller	Display	LCD color screen			
	Wind Speed Control	Intelligent multi-level adjustable			
	Additional Function	Built in 2 multi-purpose sockets, high-efficiency filter, sterilization lamp replacement prompt, foot level adjustment, lighting sterilization one key on/off			
Specification	Inner Size (W*L*H)	920*690*650	920*690*650	1320*690*650	1320*690*650
	Exterior Size (W*L*H)	1060*763*1834	1060*763*1834	1460*763*1834	1460*763*1834
	Packing Size (W*L*H) mm	1210*885*1999	1210*885*1999	1610*885*1999	1610*885*1999
	Max power of universal socket	Single socket: 800W			
	Current Rating (50/60Hz)	AC220V/1.8A		AC220V/3.6A	
	NW/GW kg	160/200	165/205	200/250	205/255
Optional Accessories		NO.			

Mini Laminar Flow Cabinet
Mini Fume Hood

◎ Table type clean equipment.

Characteristics:

- HEPA filter with efficiency: 99.995% at 0.3um.
- Microprocessor control system, LED Display.
- Manual front window is 5mm toughened glass, anti-oxidation.
- Air speed adjustable.
- Desktop type, with a handle, saving space and easy to move.
- Pre-filter is polyester fiber, washable and anti-ultraviolet radiation.
- Automatic cutting off UV lamp function by opening glass.
- CJ-600PII, CJ-600NII have color screen LCD controller (with sterilization timing, built-in socket controllable switch, front window status display, can set three position interlock, cumulative work timing, remote control)

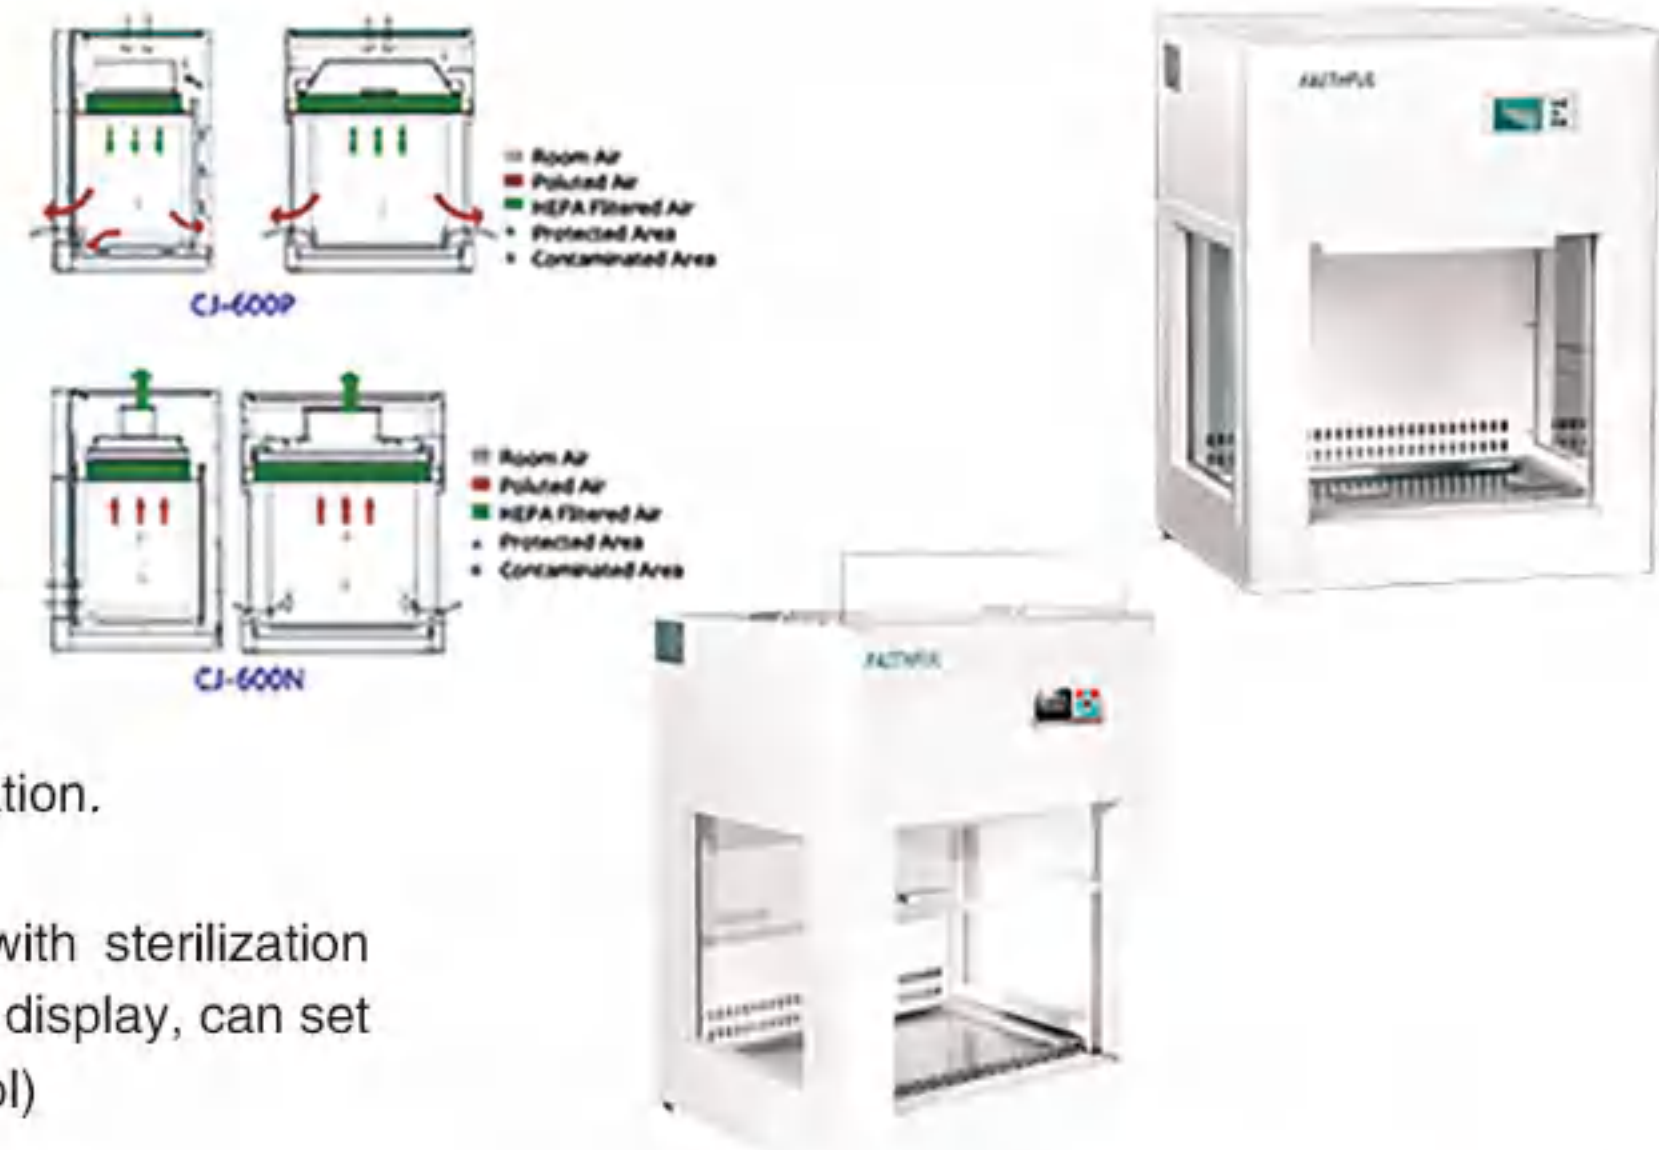

Patent No. : ZL 2018 3 0095053.5

Main Technical Parameters:

Model	CJ-600P	CJ-600N
	CJ-600PII	CJ-600NII
Applicable Scope	Protect experiment samples	Protect operator and environment
Airflow Direction	Vertical	
Function	Cleanliness	Class 100
	High Efficiency Filter	0.3um partical ≥99.999%
	Colony count	≤0.5↑/vessel (petri dish is ϕ 90mm)
	Wind Speed	initial: 0.6;final:0.2 (m/s)
	Wind Speed Range	0.2-0.6 (m/s)
	Noise Level	≤62db
	Vibration Semi-peak Value	≤3um
	Work Surface Bearing	10kg
Composition	Inner Chamber	SUS304 Stainless steel plate
	Outer Shell	Cold rolling steel electrostatic spraying exterior
	Operation Door	Tempered Glass
	Operation Door Biggest Opening	310mm
	Pre-Filter	Polyurethane
	LED Lamp	8W*1
	UV Lamp	8W*1
	Top Fan	90W one piece
Controller	Display	LED (Model II: LCD color screen)
	Wind Speed Control	Intelligent multi-level adjustable
	Additional Function	One key to open and close lighting sterilization
Specification	Inner Size (W*L*H) (mm)	480*340*370
	Exterior Size (W*L*H) (mm)	550*460*700
	Packing Size (W*L*H) mm	680*590*850
	Max Power	110W
	Current Rating (50/60Hz)	AC220V/0.5A
	NW/GW kg	36/41
	Optional Accessories	CJ-600PII, CJ-600NII: wind speed sensor

Laminar Flow Cabinet (Desktop Type)

◎ Table type clean equipment.

Characteristics:

- HEPA filter with efficiency: 99.995% at 0.3um.
- Microprocessor control system, LED Display, Air speed adjustable, HEPA filter and sterilization lamp replacement reminder function
- Desktop type, which can place higher equipment inside. Standard with universal power socket, optional internal and external USB port.
- Pre-filter is polyester fiber, washable and anti-oxidation.
- Working plate can load up to 50KG, UV lamp will be turn off automatically when open the glass window to protect users.



Patent No.: ZL 2019 2 0769812.0

Main Technical Parameters:

Model		CJ-1DZ
Applicable Station		one person one side
Airflow Direction		Vertical
Function	Cleanliness	Class 100(ISO Class 5)
	Collection Efficiency	0.3um particle ≥99.995%
	Colony count	≤0.5/vessel (petri dish is ϕ 90mm)
	Wind Speed	initial: 0.5;final: 0.2 (m/s)
	Wind Speed Range	0.2-0.5 (m/s)
	Noise Level	≤62db
	Vibration Semi-peak Value	≤3um
	Illuminat Lntensity(Lx)	≥500LX(Activity Center)
	Work Surface	50kg
Composition	Inner Chamber	SUS304 Stainless steel plate
	Outer Shell	Cold rolling steel electrostatic spraying exterior
	Operation Door	Tempered Glass
	HEPA Filter (mm)	780*533*50 one piece
	Pre- Filter (mm)	532*446*5 one piece
	Fluorescent Lamp	8W*1
	UV Lamp	8W*1
	Top Fan	160W one piece
Controller	Rated power	180W
	Display	LED
	Wind Speed Control	Intelligent multi-level adjustable
Specification	Additional Function	Buit in 1 multi-purpose socket,high-efficiency filter,sterilization lamp replacement prompt,foot level adjustment, open the door and cut off UV function
	Inner Size (W*L*H)mm	788*613*700
	Exterior Size (W*L*H)mm	852*749*1062
	Packing Size(W*L*H)mm	972*870*1292
	Max power of universal socket	800W
	Current Rating (50/60Hz)	AC220V/0.8A
	NW/GW kg	90/120
Optional		USB internal and external data connection socket, color LCD controller, Special configuration for 3D printer

CLASS II A2 Biosafety Cabinet

◎Table type clean equipment.

Characteristics:

- Color 7.0 inch touch screen controller
- Standard with high precision thermal wind sensor
- With reservation timing sterilization function,three-level authority management function,high efficiency filter,sterilization lamp service life display,built-in socket instrument controllable switch function,front window status display function,can set three position interlock function,cumulative work timing function.
- Optional: ULPA Filter



Main Technical Parameters:

Model		FS-600IIA2	FS-950IIA2	FS-1350IIA2	FS-1550IIA2	FS-1850IIA2
Classification		A2: 30 %efflux, 70%internal circulation				
Function	Cleanliness	Class 100				
	Collection Efficiency	0.3um partial≥99.995%				
	Colony count	≤0.5个/vessel (petri dish is ϕ 90mm)				
	Noise Level	≤67db				
	Vibration Semi-peak Value	≤5um				
	Downflow Velocity	0.33 ± 0.025m/s				
	Inflow Velocity	0.53 ± 0.025m/s				
	Lumination	Average luminance≥650lx,the measured value of each illuminance≥430lx				
Total air exhaust of system		230m³/h	363m³/h	500m³/h	591m³/h	705m³/h
Composition	Work surface	SUS304Stainless steel plate				
	Outer Shell	Cold rolling steel electrostatic spraying exterior				
	Operation Door	Tempered Glass				
	HEPA filter (mm)	570*380*69 570*460*69	520*420*69 980*495*69	920*420*69 1380*470*69	1120*420*69 1580*495*69	1420*420*69 1880*495*69
	Fluorescent Lamp Power	8W*2 (LED)	8W*2 (LED)	16W*2 (LED)	16W*2 (LED)	16W*2 (LED)
	UV Light Power	15W*1	15W*1	40W*1	40W*1	40W*1
	Fan	125W one piece	734W one piece	734W one piece	860W one piece	860W one piece
	Rated Power	1030W	1600W	1800W	2200W	2200W
	Working height of front window	200mm	200mm	200mm	200mm	200mm
	Maximum height of front window	280mm	440mm	440mm	440mm	440mm
Controller	Display	Full color 7.0-inch touch screen				
	Additional Function	Reservation timing sterilization function,three-level authority management function,high efficiency filter, sterilization lamp service life display,built-in socket controller to control switch function,front window status display function,three position interlock function,cumulative work timing function				
Specification	Operating Area Size (W*L*Hmm)	600*500*540	950*625*628	1350*652*600	1550*625*628	1850*625*628
	Exterior size (W*L*Hmm)	700*650*1919	1100*795*2250	1500*772*2235	1700*795*2250	2000*795*2250
	Packing Size (W*L*Hmm)	830*780*1362	1230*925*1655	1630*902*1680	1830*925*1655	2130*925*1655
	Max Power of Universal Socket	Single socket: 800W				
	NW/GW kg	160/200	294/354	320/400	368/428	401/461

Magnetic Stirrer

◎Magnetic mixing equipment with heating.

Characteristics:

- Heating power and stirring speed is stepless adjustable.
- With adjustable thermometer rack, stainless steel rods and the stir bar.
- SH-(C) series: Ceramic Plate



Patent No. : ZL 2018 3 0095053.5

Main Technical Parameters:

Model		SH-2A	SH-2B	SH-2	SH-3A	SH-3B	SH-3
		SH-2A (C)	SH-2B (C)	SH-2 (C)	SH-3A (C)	SH-3B (C)	SH-3 (C)
Function	Max. Volume (ml)	—	2000	2000	—	5000	5000
	Speed (r.p.m)	—	100~2000		—	100~2000	
	Working Time	Continuous					
	Minimum Revolution (r.p.m)	—	100	100	—	100	100
	Max.Temp. (°C)	380	—	380	380	—	380
Structure	Exterior	Cast aluminium, Surface spraying / Ceramic Coated					
	Plate Size(mm)	120 × 120			170 × 170		
	Driving Mode	—	Motor		—	Motor	
	Motor Power (W)	—	10		—	20	
	Heating Power(kW)	0.18	—	0.18	0.5	—	0.5
	Stir Bar	—	PTFE		—	PTFE	
Controller	Continuous Operation	Yes					
	Setting Mode	Scale					
	Speed Display Mode	—	Scale		—	Scale	
	Timer	No					
	Operation Function	No					
	Temp. Sensor	No					
Specification	Exterior Size (W*L*H)(mm)	200 × 120 × 90			265 × 185x190		
	Packing Size (W*L*H)(mm)	250 × 180 × 120			280 × 210 × 220		
	Plate Size (mm)	120 × 120			170 × 170		
	Plate Load	3KG			10KG		
	Power Supply (50/60Hz)	110V or 220V					
	Current Rating						
	NW/GW (kg)	1.9/3	1.9/3	1.9/3	2.2/3.4	2.2/3.4	2.2/3.4

Ceramic Magnetic Stirrer

◎Magnetic stirring ceramic equipment with heating.

Characteristics:

- Stretched shell and cover prevent leaking.
- Heating and stirring can proceed simultaneously, Fully enclosed heating plate, no flame, fast heating, strong durability.

■ New digital model Ceramic Magnetic Stirrer with the following function:

■ SH-4C

- Setting temperature precisely.
- large LCD display, temperature and rotate speed can be displayed simultaneously.
- Double sensor: outer PT100 sensor to control liquid temperature precisely, inner K model sensor to control hot plate temperature.

■ SH-II-4C

- Setting temperature and stirrer speed precisely and no button of stirrer speed.
- With speed switch to start or stop the stirring at any time.
- Timing function (0-9999min), time adjustable under artificial requirement. Audible and visual alarm equipped.
- Double sensor: outer PT100 sensor to control liquid temperature precisely, inner K model sensor to control hot plate temperature.
- One key to shift inside and outside sensor easily and precisely.
- Large display can indicate temperature , rotational speed and timing at the same time.



Patent No. : ZL 2018 3 0095053.5

Main Technical Parameters:

Model		SH-4A	SH-4B	SH-4	SH-4C	SH-II-4C
Mode		Heating	Stirring	Heating + Stirring	Digital+	Heating + Stirring
Function	Max. Volume (ML)	—	5000	5000	5000	5000
	Speed (r.p.m)	—	200 ~ 2000			
	Working Time	Continuous				
	Minimum Revolution (R.P.M.)	—	200	200	200	200
	Max. Temp (°C)	380	—	380	350	350
Structure	Exterior	Iron plate welding, surface spraying				
	Heating Plate	Ceramic coated				
	Driving Mode	—	Motor			
	Motor Power (W)	—	20	20	20	20
	Heating Power(kW)	0.6	—	0.6	0.6	0.6
	Stir Bar	no	PTFE			
	Controller	Continuous Operation	yes			
Setting Mode		Scale			Digital	
Speed Display Mode		Scale			Digital	Digital
Timer		no				yes
Operation Function		no				yes
Sensor		no			PT100	PT100
Specification	Exterior Size (W*L*H)(mm)	320 × 190 × 125				
	Packing Size (W*L*H)(mm)	390 × 240 × 230				
	Plate Size (mm)	190 × 190				
	Plate Load	10KG				
	Power Supply(50/60Hz) Current Rating	110V or 220V				
	NW/GW (kg)	5/6	5/6	5/6	5/6	5/6

Overhead Stirrer

◎Large capacity mechanical mixing equipment.

Characteristics:

- Stainless steel head restraints, more durable.
- Digital display model, stirring has three modes: positive, reverse, positive and negative alternating.
- Digital type: brushless motor.
- SH-II-8C is new big power type, high torque,can be used for mixing mud.



Patent No. : ZL 2021 3 0287232.0

Main Technical Parameters:

Model		SH-II-6	SH-II-6C	SH-II-7C	SH-II-8C
Function	Max. Volume (L)	20	20	40	40
	Digital	—	LCD	LCD	LCD
	Speed (r.p.m)	100~2500	100~2500	100~2500	100~2500
	Working Time	Continuous			
	Minimum Resolution (r.p.m)	100	100	100	100
Structure	Exterior	Plastic shell			
	Driving Mode	Motor			
	Motor Power (kW)	0.06	0.06	0.08	0.12
Controller	Continuous Operation	Yes			
	Setting Mode	Scale	Digital	Digital	Digital
	Speed Display Mode	Scale	Digital	Digital	Digital
	Timer	No	Yes	Yes	Yes
	Max. Viscosity(Mpas)	10000	10000	15000	50000
Specification	Exterior Size (W*L*H)(mm)	115 × 95 × 240			
	Packing Size (W*L*H)(mm)	400 × 250 × 210			
	Plate Size (mm)	200 × 300			
	Plate Load	50KG			
	Power Supply (50/60Hz) Current Rating	100~240V			
	NW/GW (kg)	7/8	7/8	7.5/8.5	8/9

Mini Magnetic Stirrer

◎ Beautiful mini mixing equipment.

Characteristics:

- Shell is all plastic material (ABS), lightweight and durable.
- Mixing smoothly and fast, stirring speed stepless adjustable
- SH-II-2: with LED light ● SH-II-3: without LED light



Patent No. : ZL 2015 3 0547467.3

Main Technical Parameters:

Model Mode		SH-II-2 With light	SH-II-3 Without light
Function	Max. Volume (ml)	1000	
	Speed (r.p.m)	100 ~ 500 or 100 ~ 2000	
	Working Time	Continuous	
	Minimum Resolution (R.P.M.)	100	
Structure	Exterior	Plastic	
	Driving Mode	Motor	
	Motor Power	0.01kW	
Controller	Continuous Operation	Yes	
	Setting Mode	Scale	
	Speed Display Mode	Scale	
	Timer	No	
	Operation Function	No	
	Speed &Temp. Sensor	No	
Specification	Exterior Size (W*L*H)(mm)	φ 138*60	
	Packing Size (W*L*H)(mm)	210*170*88	
	Plate Size (mm)	φ 128	
	Power Supply (50/60Hz) Current Rating	100V~240V	
	NW/GW (kg)	0.6/0.7	

Four Rows Magnetic stirrer

◎ Magnetic mixing equipment.

Characteristics:

- 4 unit stainless hotplate can work together or separately.
- Stirring speed is stepless adjusted.



Patent No. : ZL 2015 3 0547467.3

Main Technical Parameters:

Model		SH-6	SH-7
Function	Max. Volume (ml)	1000ml*4	
	Speed (r.p.m)	100 ~ 2000	
	Working Time	Continuous	
	Minimum Resolution	100	
Structure	Exterior	Cold plate spraying, stainless steel plate	
	Driving Mode	Motor	
	Motor Power	0.01kW	0.02kW
Controller	Continuous Operation	Yes	
	Setting Mode	Scale	
	Speed Display Mode	Scale	
	Timer	No	
	Operation Function	No	
	Exterior Size (W*L*H)(mm)	300*270*80	400*320*120
Specification	Packing Size (W*L*H)(mm)	340*310*110	440*360*150
	Plate Size (mm)	300*250	400*300
	Plate Load	5KG	20KG
	Power supply (50/60Hz) Current Rating	110 or 220V	
	NW/GW (kg)	3/3.6	6/7

Electronic Control Heating Mantle

◎ Up to 450 °C general heating.

Characteristics:

- Electronic temperature regulation mode with characteristics of stepless speed adjustable.



Patent No. : ZL2019 2 0769431.2

Main Technical Parameters:

Model		98-I-B									
Function	Capacity(ml)	50	100	250	500	1000	2000	3000	5000	10000	20000
	Heating Mode	Surface heat-conduction									
	Surface Max.Temp.(°C)	450℃									
Structure	Heating Element	Nichrome wire									
	Shell	Cold roller steel plate, surface spraying									
	Insulation Layer	High quality aluminum silicate cotton									
	Heat Power (kW)	0.08	0.1	0.15	0.25	0.35	0.45	0.6	0.8	1.2	2.5
Controller	Working Mode	Continuous									
Specification	Exterior Size (mm)	c 220 × 165				c 280 × 220	c 330 × 230	c 340 × 245	c 350 × 250	c 425 × 320	c 470 × 340
	Packing Size (mm)	230 × 230 × 195				290 × 290 × 300	340 × 340 × 350	360 × 360 × 300	390 × 390 × 310	430 × 430 × 350	510 × 510 × 380
	Voltage(V)	100 – 120V or 200 – 240V						200 – 240V			
	N.W.(Kg)	2.5				5.5	6.5	7.5	8	9.8	16
	G.W.(Kg)	2.8				6	7	8	9.2	12	20

● We can produce different size heating mantle as customer' s requirement. For example: 4000ml,6000ml,50 liters, 100 liters and etc.

Magnetic Stirring Heating Mantles

◎ Up to 450 °C general heating equipment.

Characteristics:

- Heating and stirring can be used simultaneously, stepless speed adjustable.



Patent No. : ZL2019 2 0769431.2

Main Technical Parameters:

Model		98-II-B									
Function	Capacity(ml)	50	100	250	500	1000	2000	3000	5000	10000	20000
	Heating Mode	Surface heat-conduction									
	Surface Max.Temp.(℃)	450℃									
	Speed Range	0 ~ 1600rpm									
Structure	Heating Element	Nichrome wire									
	Stir Bar	PTFE									
	Insulation Layer	High quality aluminum silicate cotton									
	Shell	Cold roller steel plate,surface spraying									
	Motor Power	0.01kW									
Controller	Heating Power (kW)	0.08	0.1	0.15	0.25	0.35	0.45	0.6	0.8	1.2	2.5
	Working Mode	Continuous									
Specification	Exterior Size (mm)	c 220 × 165				c 280 × 220	c 330 × 230	c 340 × 245	c 350 × 250	c 425 × 320	c 470 × 340
	Packing Size (mm)	230 × 230 × 195				290 × 290 × 300	340 × 340 × 350	360 × 360 × 300	390 × 390 × 310	430 × 430 × 350	510 × 510 × 380
	Voltage(V)	100 ~ 120V or 200 ~ 240V						200 ~ 240V			
	N.W. (Kg)	2.5				5.5	6.5	7.5	8	9.8	16
	G.W. (Kg)	2.8				6	7	8	9.2	12	20

● We can produce different size heating mantle as customer' s requirement. For example: 4000ml,6000ml,50 liters, 100 liters and etc.

Digital Display Heating Mantle

◎ Up to 450 °C general heating equipment.

Characteristics:

- PID single screen temperature controller. fast heating, good temperature uniformity and high precise temperature control.
- Several rows type, produce as customer inquiry, beautiful shape, easy to operate and effective. Beautiful shape, easy to operate and effective.
- PT100 Temperature sensor, with adjustable sensor rack and stainless rods.

Main Technical Parameters:

Model		98-II-C									
Function	Capacity(ml)	50	100	250	500	1000	2000	3000	5000	10000	20000
	Heating Mode	Surface heat-conduction									
	Surface Max.Temp.(°C)	450°C									
	Temperature control range	RT+20 ~ 250°C									
Structure	Heating Element	Nichrome wire									
	Insulation Layer	High quality aluminum silicate cotton (with CE)									
	Shell	Cold roller steel plate,surface spraying									
	Heating Power (kW)	0.08	0.1	0.15	0.25	0.35	0.45	0.6	0.8	1.2	2.5
Controller	Working Mode	Continuous									
Specification	Exterior Size (mm)	c 220 x 165			c 280 x 220		c 330 x 230	c 340 x 245	c 350 x 250	c 425 x 320	c 470 x 340
	Packing Size (mm)	230 x 230 x 195			290 x 290 x 300		340 x 340 x 350	360 x 360 x 300	390 x 390 x 310	430 x 430 x 350	510 x 510 x 380
	Voltage(V)	100 ~ 120V or 200 ~ 240V						200 ~ 240V			
	N.W. (Kg)	2.5			5.5		6.5	7.5	8	9.8	16
	G.W. (Kg)	2.8			6		7	8	9.2	12	20

● We can produce different size heating mantle as customer' s requirement. For example: 4000ml,6000ml,50 liters, 100 liters and etc.



Patent No. : ZL2019 2 0769431.2

Digital & Magnetic Stirring Heating Mantles

◎ Up to 450 °C general heating equipment.

Characteristics:

- PID single screen temperature controller.
- Heating and stirring can be used simultaneously, stepless speed adjustable.
- PT100 temperature sensor, with adjustable sensor rack and stainless rods.

Main Technical Parameters:

Model		98-III-B									
Function	Capacity(ml)	50	100	250	500	1000	2000	3000	5000	10000	20000
	Heating Mode	Surface heat-conduction									
	Surface Max. Temp.(℃)	450℃									
	Temperature control range	RT+20 - 250℃									
	Speed Range	0 - 1600rpm									
Structure	Heating Element	Nichrome wire									
	Stir Bar	PTFE									
	Insulation Layer	High quality aluminum silicate cotton									
	Shell	Cold roller steel plate,surface spraying									
	Motor Power	0.01kW									
Controller	Heating Power (kW)	0.08	0.1	0.15	0.25	0.35	0.45	0.6	0.8	1.2	2.5
	Working Mode	Continuous									
Specification	Exterior Size (mm)	ϕ 220 × 165				ϕ 280 × 220	ϕ 330 × 230	ϕ 340 × 245	ϕ 350 × 250	ϕ 425 × 320	ϕ 470 × 340
	Packing Size (mm)	230 × 230 × 195				290 × 290 × 300	340 × 340 × 350	360 × 360 × 300	390 × 390 × 310	430 × 430 × 350	510 × 510 × 380
	Voltage(V)	100 - 120V or 200 - 240V						200 - 240V			
	N.W. (Kg)	2.5				5.5	6.5	7.5	8	9.8	16
	G.W. (Kg)	2.8				6	7	8	9.2	12	20

● We can produce different size heating mantle as customer' s requirement. For example: 4000ml,6000ml,50 liters, 100 liters and etc.



Patent No. : ZL2019 2 0769431.2

Several Rows Magnetic Stirring Heating Mantles

◎ Up to 450 °C general heating stirring equipment.

Characteristics:

- 98-IV-B: Electronic temperature regulation heating mode.
- 98-V-B: Electronic temperature regulation heating mode. heating and stirring can proceed simultaneously; stepless speed adjustment.
- 98-V-B model without 100ml

Main Technical Parameters:

Model		98-IV-B 98-V-B											
Function	Specification (ml)	2 × 100	2 × 250	2 × 500	2 × 1000	4 × 100	4 × 250	4 × 500	4 × 1000	6 × 100	6 × 250	6 × 500	6 × 1000
	Heating Mode	Surface heat conduction											
	Surface Max. Temperature	450°C											
	Temp. Range	RT+20 ~ 250°C											
Structure	Speed Range	98-IV-B :no / 98-V-B :0~1400rpm											
	Heating Element	Nickel chromium alloy wire											
	Stir Bar	98-IV-B :no / 98-V-B :PTFE											
	Outer Shell	Cold rolled steel plate, surface spraying											
Controller	Motor Power	98-IV-B :no / 98-V-B :0.01kW											
	Heating Power (kW)	2 × 0.1	2 × 0.15	2 × 0.25	2 × 0.35	4 × 0.1	4 × 0.15	4 × 0.25	4 × 0.35	6 × 0.1	6 × 0.15	6 × 0.25	6 × 0.35
	Work Model	Continuous											
	Exterior Size (mm)	280*140*106	320*160*170	360*180*180	420*210*200	530*140*160	610*160*170	690*180*180	810*210*200	820*140*160	940*160*170	1060*180*170	1240*210*200
Specification	Packing Size (mm)	320*180*190	360*190*200	400*220*210	570*180*190	570*180*190	650*190*200	730*220*210	850*250*230	860*180*190	980*190*200	1100*220*210	1280*250*230
	Voltage	100 ~ 120V or 200 ~ 240V											
	N.W. (Kg)	4	4	4	7	8	8	8	14	12	12	12	21
	G.W. (Kg)	5	5	5	8	10	10	10	16	15	15	15	24

● Accessories: Adjustable Sensor Rack with Stainless Steel Rods or Horizontal rods.

● We can produce different rows heating mantle as customer' s requirement.

Hot Plate

◎ Uniform temperature hot plate.

Characteristics:

- Aluminum hot plate, uniform surface temperature
- Heating up fast and uniform, heating power is stepless adjustable
- Digital hot plate has the more functions as follows:
Digital display can read the temperature more clearly.

Main Technical Parameters:

Model		SH-5A/5C	SH-6A/6C	SH-7A/7C	SH-8A/8C	SH-9A/9C
Structure	Working Time	Continuous				
	Max Temp. (°C)	350°C				
	Outer Shell	Iron plate welding, surface spraying				
	Hot Plate	Aluminum tensile				
Controller	Heating Power(W)	1200	1800	2000	2600	3000
	Continuous Operation	Yes				
	Setting Method	Scale / Digital				
	Timer	No / Digital				
Specification	Operation Function	No				
	Temperature Sensor	K Mode				
	Exterior Size (W*L*H)(cm)	30*30*18	35*45*18	40*40*18	35*60*18	40*60*18
	Packing Size (W*L*H)(cm)	34*37*22	42*50*22	45*47*22	42*65*22	47*65*22
	Plate Size (mm)	300*300	350*450	400*400	350*600	400*600
	Plate Load	20KG	30KG	30KG	38KG	40KG
	Power Supply (50/60Hz)	220V				
	NW/GW (kg)	6.2/7	8.4/9.6	8.5/9.8	11/13	12/14.2

Patent No. : ZL 2019 2 0769297.6



New Hot Plate, Graphite Hot Plate

Characteristics:

- Aluminum hot plate or Graphite hot plate, uniform surface temperature.
- Heating up fast and uniform.
- Digital hot plate: digital display indicating temperature of hot plate clearly.



Patent No. : ZL 2019 2 0769297.6

Main Technical Parameters:

Model	SH-5		SH-8	SH-9
	SH-5B		SH-8B	SH-9B
	SH-II-5B		SH-II-8B	SH-II-9B
Max Temp. (°C)	SH-5,SH-8,SH-9: 320°C SH-5B,SH-8B,SH-9B: 350°C SH-II-5B,SH-II-8B,SH-II-9B: 400°C			
Outer Shell	Iron plate welding, surface spraying			
Hot plate	Aluminum tensile: SH-5, SH-5B,SH-8,SH-8B, SH-9, SH-9B: Graphite Plate: SH-II-5B, SH-II-8B,SH-II-9B:			
Heating power(W)	SH-5: 800 SH-5B: 1200 SH-II-5B: 1800		SH-8: 1500 SH-8B: 2400 SH-II-8B: 3000	SH-9: 2200 SH-9B: 3500 SH-II-9B: 4500
Setting method	Scale: SH-5, SH-8, SH-9 Digital: SH-5B,SH-8B,SH-9B, SH-II-5B, SH-II-8B, SH-II-9B			
Timer	No / Digital			
Temperature sensor	K model			
Temp. accuracy	SH-5,SH-8,SH-9: ± 10% SH-5B,SH-8B,SH-9B,SH-II-5B,SH-II-8B,SH-II-9B: ± 1%			
Plate Temp. Uniformity	SH-5,SH-8,SH-9: ± 15% SH-5B,SH-8B,SH-9B,SH-II-5B,SH-II-8B,SH-II-9B: ± 10%			
Exterior size (W*L*H) (mm)	340*370*220		420*500*220	470*650*220
Packing size (W*L*H) (mm)	SH-5 / SH-5B: 520*380*250 SH-II-5B: 550*410*270		SH-8 / SH-8B: 560*520*250 SH-II-8B: 600*560*270	SH-9 / SH-9B: 660*620*250 SH-II-9B: 700*660*270
Plate size (mm)	300*300		450*350	600*400
Plate load	20KG		30KG	40KG
Power supply (50/60Hz)	220V			
NW/GW (kg)	SH-5 / SH-5B: 9 / 10 SH-II-5B: 12 / 13.5		SH-8 / SH-8B: 11 / 12 SH-II-8B: 19 / 20	SH-9 / SH-9B: 15 / 17 SH-II-9B: 28 / 30

Note: SH-9B, SH-II-9B: without plug.

Thermostatic Water Baths

◎ Used for precision constant temperature and auxiliary.



Characteristics:

- Inner tank: 1 hole, 2 holes, 2 rows & 4 four holes, 2 rows & 6 holes are stainless steel stretching inner chamber.
- 1 row & 4 holes, 1 row & 6 holes, 2 rows & 8 holes are stainless steel inner chamber.

Main Technical Parameters:

Name		1 hole	1 row & 2 holes	1 row & 4 holes	1 row & 6 holes	2 rows & 4 holes	2 rows & 6 holes	2 rows & 8 holes
Model		WB-3-1	WB-7-2	WB-13-4	WB-19-6	WB-12-4	WB-18-6	WB-23-8
Heating mode		Bottom heating,water temperature natural convection						
Function	Temp. Range	Rt+5~100℃						
	Temp. Resolution Ratio	0.1℃						
	Temp. Motion	± 0.5℃						
	Temp. Uniformity	± 1℃						
Structure	Water Sink	Stainless steel, surface electrolysis treatment						
	Outer Shell	Cold rolled steel plate, surface electrostatic powder spray						
	Heater	Stainless steel U type heating tube						
Power Rating		300W	600W	1000W	1500W	800W	1200W	2000W
Controller	Temp. Control Mode	PID						
	Temp. Setting Mode	Touch button setting						
	Temp. Display Mode	Measuring temperature: display on the three digital tubes upper row , setting temperature: display on the lower row						
	Timer	0~999 min (with timing function)						
	Timing Function	Fixed temperature operation, timing function, auto stop.						
	Program Schema	Optional: multi-section program control						
	Additional Function	Deviation correction, menu key lock, power failure back-up, power-off parameter memory, PID adjustable						
Sensor		Thermal resistor						
Safety device		Over-temperature alarm, short-circuit protection						
Specification	Inner Chamber Size(W*L*H)(mm)	160*160*130	305*160*130	600*165*130	900*165*130	305*305*130	470*305*130	600*300*130
	Exterior Size (W*L*H)(mm)	200*210*210	340*210*210	635*165*210	930*210*210	340*350*210	510*350*210	635*340*210
	Packing Size (W*L*H)(mm)	270*270*275	405*275*275	715*260*275	1000*260*275	415*415*275	575*410*275	700*415*275
	Internal Volume	3.3L	6.3L	12.8L	19.3L	12L	18.6L	23.4L
	Cover Aperture	φ 120mm						
	Cover Material	PP Plastic						
	Cover Number Per Hole	5						
	Power Supply (50/60Hz) Current Rating	AC220V 1.4A	AC220V 2.7A	AC220V 4.5A	AC220V 6.8A	AC220V 3.6A	AC220V 5.4A	AC220V 6.8A
	NW/GW (kg)	3KG/3.5KG	4KG/5KG	7KG/8KG	8KG/10KG	6KG/7KG	8KG/9KG	9KG/11KG

Thermostatic Water Baths (Stretching Inner Chamber)

◎ Used for precision constant temperature and auxiliary.



Characteristics:

- Stainless steel stretching inner container and roof cover.
- Intelligent temperature controller with PID program, digital tube display and function of timing and over-temperature protection.
- Add the electric drain switch, one-button operation, convenient to drain, Note:single hole water baths have no drain function.
- Power off when water shortage to ensure the safe operation of the product.

Patent No. : ZL201920769902X

Main Technical Parameters:

Classification Specifications		1 hole	1 row & 2 holes	2 rows & 4 holes	2 rows & 6 holes
Model	DK-2000-IIIIL	√	√	√	√
Heating Mode		Nature water convection heat transfer			
Function	Temp. Range	RT+5 ~ 100℃			
	Temp. Resolution Ratio	0.1℃			
	Temp. Motion	± 0.5℃			
	Temp. Uniformity	± 1.0℃			
Structure	Inner Chamber	Stainless steel			
	Outer Shell	Cold – rolled steel plate, resistance to chemical reagents coating on the surface			
	Heater	Stainless steel heating tube			
	Power Rating	0.4kW	0.5kW	1.0kW	1.5kW
Controller	Temp. Control Mode	PID			
	Temp. Setting Mode	Touch button setting			
	Temp. Display Mode	Measuring temperature displays on the three digital tubes upper row, set temperature displays on the lower row			
	Timer	0 ~ 9999min (with timing wait function)			
	Operation Function	Fixed temperature operation, timing function, auto stop.			
	Program Mode	Optional			
	Additional Function	Deviation Correction, menu key locked, power failure back-up, power-off memory			
	Sensor	NTC			
Safety Device		Over temperature alarm			
Specification	Inner Chamber Size(W*L*H)(mm)	150*135*150	300*135*150	325*300*150	500*300*150
	Exterior Size (W*L*H)(mm)	170*154*210	318*168*210	350*318*210	524*322*210
	Packing Size (W*L*H)(mm)	240*230*280	390*240*280	420*390*280	600*390*280
	Volume	3.4L	6.1L	14.6L	22.5L
	Load Per Rack	5kg			
	Shelf Number	1			
	Power Supply (50/60Hz) Current Rating	AC220V/1.8A	AC220V/2.3A	AC220V/4.5A	AC220V/6.8A
	NW/GW (kg)	3.3/4	4.5/5	6/7	7.5/9

Transparent Water Bath

◎ Used for precision constant temperature and auxiliary.



Characteristics:

Patent No. : ZL201920769902X

- Using innovative design structure, effectively prevent steam leakage.
- Intelligent temperature control instrument with high brightness digital display, light-touch type key has the advantages of simple operation and high precision temperature control.
- Shell, interior and cover of the product are all made of transparent engineering plastics, can clearly see the object to be heated.
- Power off when water shortage to ensure the safe operation of the product.

Main Technical Parameters:

Model	DK-98-IV				
Capacity	2.6L	6L	9L	12L	20L
Voltage (V)	200-240V/100-120V				
Power (kW)	0.4	0.5	0.8	1.0	1.5
Temp. Motion (℃)	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5
Temp. Range (℃)	Rt+5~100				
Temp. Sensitivity (℃)	≤ ± 1	≤ ± 1	≤ ± 1	≤ ± 1	≤ ± 1
Shelves Height (mm) Distance from bottom	100mm	100mm	100mm	150mm	100mm
Shelves Holes Diameter	ϕ 18.7mm*16	ϕ 18.7mm*32	ϕ 18.7mm*48	ϕ 18.7mm*48	ϕ 18.7mm*96
Inner Chamber Size (L*W*H)	143*130*150	290*145*150	280*220*150	285*225*200	485*285*150
Exterior Size (L*W*H)	254*190*193	401*190*193	400*260*190	401*276*242	610*338*200
Packing Size (L*W*H)	295*270*275	457*270*275	450*350*270	450*350*300	640*410*230
N.W.(KG)	2.1	3.1	3.5	3.9	6
G.W. (KG)	2.7	3.8	5	4.8	8.5

Thermostatic Water Baths

◎Used for precision constant temperature and auxiliary.



Characteristics:

- SHHW21.420AII model cover for the two holes water bath, can be used as a digital two holes water bath.
- SHHW21.600AII model cover for the six holes water bath, can be used as a digital six holes water bath.

Patent No. : ZL201920769902X

Main Technical Parameters:

Model		HHW21.420AII	SHHW21.420AII	HHW21.600AII	SHHW21.600AII
Function	Temp Range	RT+5 ~ 65℃	RT+5 ~ 100℃	RT+5 ~ 65℃	RT+5 ~ 100℃
	Temp Resolution Ratio	0.1℃			
	Temp Motion	± 0.5℃			
	Temp Uniformity	± 1.0℃			
Structure	Inner Chamber	High quality hairline stainless steel plate			
	Outer Shell	Cold rolling steel electrostatic spraying exterior			
	Cover	High quality hairline stainless steel plate			
	Cover Circle	Without	With	Without	With
Controller	Test Tube Rack	Without	With	Without	With
	Heater	Stainless steel heating tube			
	Power Rating	0.5kW	1kW	0.75kW	2kW
	Temp Control Mode	PID			
	Temp Setting Mode	Touch button setting			
	Temp Display Mode	Measuring temperature: display on the three digital tubes upper row ; setting temperature: display on the lower row			
	Timer	0 ~ 999min			
	Operation Function	Fixed temperature operation, timing function, auto stop.			
	Program Function	No			
	Additional Function	Deviation correction、Menu key lock、Power-off compensation、Power failure memory			
	Sensor	NTC			
Safety Device		Over temperature alarm			
Specification	Sink Size(W*L*H)(mm)	420*180*140		600*300*200	
	Exterior Size (W*L*H)(mm)	570*230*270		750*350*360	
	Packing Size (W*L*H)(mm)	720*320*380		900*440*440	
	Volume	11L		36L	
	Supply (50/60Hz) Current Rating	AC220V/2.3A	AC220V/4.5A	AC220V/6.8A	AC220V/9.1A
	NW/GW (kg)	8/9.5	8.5/10	17/19	18/20
	Optional Accessories	Different sizes can be customized, can add power off protection function when water shortage.			

Thermostatic water tank
[Stretching Inner Chamber]

Characteristics:

- The inner liner and water bath cover are processed using high-quality stainless steel stretching technology, and the surface is treated with anti-corrosion technology. The top cover is made of high-temperature resistant plastic material, which is lightweight and beautiful.
- Add a water discharge switch, one click operation, convenient for water discharge.
- The anti dry burning (water shortage and power outage) function ensures the safe operation of the product.



Main Technical Parameters:

Modle		HHW111	SHHW11L	HHW30L	SHHW30L
Heating Mode		Nature water convection heat transfer			
Function	Temp. Range	RT+5–65℃	RT+5–100℃	RT+5–65℃	RT+5–100℃
	Temp. Resolution Ratio	0.1℃			
	Temp. Motion	± 0.5℃			
	Temp. Uniformity	± 1.0℃			
Structure	Inner Chamber	SUS304 stretching			
	Outer Shell	Cold rolling steel electrostatic spraying exterior			
	Heater	Stainless steel heating tube			
	Power Rating	0.3kW	0.6kW	1.0kW	1.5kW
Controller	Temp.Control Mode	PID			
	Temp. Setting Mode	Touch button setting			
	Temp. Display Mode	Measuring temperature displays on the three digital tubes upper row, set temperature displays on the lower row			
	Timer	0~9999min (with timing wait function)			
	Operation Function	Fixed temperature operation, timing function, auto stop.			
	Program Mode	Optional			
	Additional Function	Deviation Correction, menu key locked, power failure back–up, power–off memory			
	Sensor	NTC			
Safety Device		Over temperature alarm			
Specification	Inner Chambersize(W*L*H)(mm)	295*235*150	295*235*150	500*296*200	500*296*200
	Exterior Size(W*L*H)(mm)	360*297*345	360*297*345	565*358*395	565*358*395
	Packing Size(W*L*H)(mm)	390*327*395	390*327*395	595*388*445	595*388*445
	Volume	11L		30L	
	Load Per Rack	5kg			
	Shelf Number	1			
	Power Supply(50/60Hz)Current Rating	AC220V/1.3A	AC220V/2.7A	AC220V/4.5A	AC220V/6.8A
	Nw/GW (kg)	3.3/4	4.5/5	6/7	7.5/9

Big Size Water Baths

Characteristics:

- The enclosure of the product is formed and machined by using high-quality steel plate. Static electric spraying process is adopted on the surface, which is sturdy and durable. The inner container is finished by the stainless steel stretching.
- The liner and upper cover are made of high-quality stainless steel plate, featuring strong corrosion resistance.
- U-shaped heating pipe is adopted for direct heating in water. The temperature rise is quick and the thermal loss is small.
- Single-row digital display or intelligent temperature controller boasts simple operation and favorable application effect.



Main Technical Parameters:

Model	DK-98-IVL
Supply voltage	220V/60HZ
Power(W)	2.4kw
Temp-motion(°C)	+0.5°C
Temp-range(°C)	RT+5 ~ 100°C
Senility of Temp Control(°C)	≤ ± 1
Display error(°C)	≤ ± 2.5
Chamber Size(mm)	620*500*200mm
Products Size(mm)	681*560*301mm
Packing Size(mm)	595*388*445mm
N.W.(Kg)	15KG
G.W.(Kg)	20KG

Ultrasonic Cleaner Digital Model, With Timer And Heater

Characteristics:

- 1. Use ordinary tap water, alcohol or solvent as cleaning;
- 2. High power transducer cleaning effect significantly, usable macroscopic observation;
- 3. After cleaning objects shine light;
- 4. Digital LCD control boot time;
- 5. The stainless steel shell, bladder and cover, more upscale;
- 6. Waterproof properties is greatly improved, more safety products last;
- 7. With constant temperature system with heating;
- 8. The stainless steel ultrasonic cleaning basket (optional).



Main Technical Parameters:

Model	FSF-010S	FSF-020S	FSF-030S	FSF-031S	FSF-040S	FSF-060S	FSF-080S	FSF-100S
Frequency	40KHz							
Timer	0-30 min							
Heater	RT-80°C							
Transducer(PCS)	1	2	3	3	4	6	8	10
Capacity	2L	3.2L	4.5L	6.5L	10L	15L	22L	30L
Ultrasonic Power(W)	80	120	180	180	240	360	480	600
Heating Power	150W	150W	200W	200W	450W	450W	600W	600W
Tank size (L*W*H MM)	150*135*100	240*135*100	300*150*100	300*150*150	300*240*150	300*300*150	500*300*150	500*300*200
Unit Size (L*W*H MM)	175*160*210	265*165*220	325*180*220	325*180*280	325*265*280	360*325*285	530*325*285	530*325*325
Packing size (L*W*H MM)	260*260*290	340*245*310	410*255*310	410*255*355	435*360*350	460*410*340	635*405*340	635*405*390
G.W/N.W	2.4/2.9	3.6/4.3	4.6/5.5	5.4/6.3	7.3/8.4	9.1/10.3	12.6/14	14.4/16

Ultrasonic Cleaner Digital Series, With timer

Characteristics:

- 1. Use just tap water, or industrial alcohol and solvent cleaner for more higher cleaning requirement.
- 2. Digital timer, clear digital LCD display.
- 3. Power supply can be either AC 100 120V or AC 200 240V.
- 4. Industrial control chip microcontroller. flexible circuit boards control, more secure & stable.
- 5. Stainless steel made, resistance to wear.
- 6. Warranty time: 12 months.



Main Technical Parameters:

Model	Frequency	Transducer (PCS)	Capacity	Ultrasonic Power(W)	Timer	Tank Size (L*W*H MM)	Unit Size (L*W*H MM)	G.W/N.W
FSF-008	42KHz	1	0.8	50	0-30 min	150*85*65	180*110*150	1.3/1

Portable Pressure Steam Sterilizer

Characteristics:

- 1.Fully stainless steel structure.
- 2.Double scale indication pressure gauge.
- 3.Electric heated.
- 4.Easy to operate, safe and reliable.

Main Technical Parameters:

Model	Capacity	Working Pressure	Working Temperature	Max.Safety Pressure	Heat Average	Power	Packing Size	G.W/N.W
FSF-18LD	18L Φ280*260mm	014-016Mpa	126℃	0.165Mpa	≤ ± 0.1℃	2KW/ AC200V.50Hz	410*410*520mm	18kg/16kg
FSF-24LD	24L Φ280*390mm						410*410*630mm	19kg/17kg



Portable Pressure Steam Sterilizer

(Electric or LPG heated)

Characteristics:

- 1.Fully stainless steel structure.
- 2.Electric or LPG heated.
- 3.Double scale indication pressure gauge.
- 4.Easy to operate, safe and reliable.

Main Technical Parameters:

Model	Capacity	Working Pressure	Working Temperature	Max.Safety Pressure	Power	Packing Size(mm)	G.W/N.W
FSF-18LM	18L	0.14-0.16Mpa	126℃	0.165Mpa	AC220V.50Hz/2Kw	410*410*430	16/14KG
FSF-24LM	24L					410*410*550	17/15KG



Portable Pressure Steam Sterilizer

Characteristics:

- 1.Fully stainless steel structure.
- 2.Hand wheel type of quick-open door structure.
- 3.Indicator light indicates working state.
- 4.Double scale indication pressure gauge.
- 5.Time scope:0~60min.
- 6.Automatically shut off with beep reminding after sterilization.
- 7.Electric heated.
- 8.Easy to operate, safe and reliable.

Main Technical Parameters:

Model	Capacity	Working Pressure	Working Temperature	Temp. range	Max.Safety Pressure	Timer range	Heat average	Power	Packing Size(mm)	G.W/N.W
FSF-18LDJ	18L	0.14-0.16Mpa	126℃	126℃	0.165Mpa	0-60min	≤ ± 1℃	AC220V.50Hz/2Kw	410*410*430	16/14KG
FSF-24LDJ	24L								410*410*550	17/15KG



Vertical Pressure Steam Sterilizer

Characteristics:

- 1.Fully stainless steel structure.
- 2.Hand wheel type of quick-open door structure.
- 3.Door safety lock system.
- 4.Digital display of working status,touch of key.
- 5.Self-inflating type seal.
- 6.Over temperature&over pressure auto-protection.
- 7.Safe protection of water lacking.
- 8.Automatically shut off with beep reminding after sterilization.
- 9.Auto discharge the cool air,and steam discharging auto matically after sterilization.
- 10.Used for sterilization of medical instruments, medical cotton products.
- 11.Fully stainless steel SUS304/AISI 304 -3mm.
- 12.Possible to install drying system according request.



FSF-35HD/50HD/75HD/100HD

Main Technical Parameters:

Model	FSF-35HD	FSF-50HD	FSF-75HD	FSF-100HD
Capacity	35L (Φ318*450)mm	50L (Φ340*550)mm	75L (Φ400*600)mm	100L (Φ440*650)mm
Working pressure	0.22Mpa			
Working temperature	134℃			
Max.working pressure	0.23Mpa			
Heat average	≤ ± 1℃			
Timer	0~99min or 0~99hour59 min			
Temp.range	105℃~134℃			
Power	2.5KW/AC220V.50Hz	3KW/AC220V.50Hz	4.5KW/AC220V.50Hz	
Exterior size	450*450*1010mm	510*470*1130mm	560*560*1120mm	540*560*1250mm
Packing size	570*550*1150mm	590*590*1280mm	650*630*1280mm	680*630*1370mm
G.W/N.W	72kg/56kg	88kg/68kg	100kg/80kg	110kg/85kg

Stainless Steel Water Distiller [Automatic Control Type]

◎This product uses tap water as the source water and uses electric heating distillation method to produce distilled water, which is suitable for medical treatment, chemical industry, scientific research , laboratories and etc.

Characteristics:

- The whole shell is designed in stainless steel, and the evaporation tank, con-denser and heater are all made of stainless steel, which are resistant to cor-rosion and aging.
- With water shortage protection function, when the liquid level is too low, it will automatically alarm and quickly cut off the heating, to ensure that the heater will not burn out, it is easy to operate, safe and reliable.
- Automatic water replenishment function, when the cooling water is restored to supply water, it will automatically enter the evaporation bucket, to ensure that the float switch automatically controls the power supply, and automati-cally restore the output of distilled water.



DZ

Main Technical Parameters:

Model	Voltage(V)	Output(L/H)	Heating Power(kw)	G.W(kg)	N.W.(kg)	Exterior Size (DiaxH) mm	Packing Size (LxWxH) mm
DZ-5LIII	220	≥5	4.5	9.5	6	φ 305 × 730	380 × 350 × 870
DZ-10LIII	380	≥10	7.5	10.5	7.5	φ 335 × 830	390 × 350 × 900
DZ-20LIII	380	≥20	15	13.5	11	φ 405 × 980	410 × 410 × 1055

FSF-300 Basic Power Supply

Characteristics:

- Molding shell,touch keys,microprocessor intelligent control.
- With automatic memory function.
- With standard,timing operation function.
- Automatic detection of no-load,over-load.



Specifications:

Type of Output	Output range	Increment	Timer Range	Display	Output jacks
Constant-Voltage,Current	5~300V,1~300mA,Maximum 90W	1V,1mA	1min~9hr,59min	LED	Two sets of output jacks

FSF-600 Basic Power Supply

Characteristics:

- Molding shell,touch keys,microprocessor intelligent control.
- With automatic memory function.
- With standard,timing operation function.
- Automatic detection of no-load,over-load.



Specifications:

Type of Output	Output range	Increment	Timer Range	Display	Output jacks
Constant-Voltage,Current	5~300V,1~300mA,Maximum 90W	1V,1mA	1min~9hr,59min	LED	Two sets of output jacks

FSF-300C Universal Power Supply

Characteristics:

- Molding shell,touch keys,microprocessor intelligent control.
- With automatic memory function.
- With standard,timing operation function.
- Automatic detection of no-load,over-load.



Specifications:

Type of Output	Output range	Increment	Timer Range	Display	Output jacks
Constant-Voltage, Current or Power	5~300V,1~400mA 1~120W	1V,1mA	1min~99hr,59min	LCD display with backlight	Four sets of output jacks

FSF-600C Universal Power Supply

Characteristics:

- Molding shell, touch keys, dual core microprocessor intelligent control
- It can store 10 electrophoresis methods; With automatic memory function.
- With constant voltage, constant current, constant power, misoperation, fault intelligent prompt functions.
- Automatic detection of no-load, over-load, short circuit, rapid resistance change, ground leak and system overheating.



Specifications:

Type of Output	Output range	Increment	Timer Range	Display	Output jacks
Constant-Voltage, Current or Power	10~600V,1~500mA 1~300W	1V,1mA	1min~99hr,59min	LCD display with backlight	Four sets of output jacks

FSF-SPAT Horizontal Electrophoresis Cell

Characteristics:

- Abundant buffer not only guarantees cooling effect, but also keeps the pH Value stable during the whole experiment process.
- Unfolded electrodes make repair and replacement easy and quick.
- With the sample background color design on the tray, convenient to adding the sample.
- Safety cover open button design, convenient opening the cover.
- The transparent top lid effectively prevents liquid in the cell from volatilizing and avoids electricity leakage.
- Auto-switch-off when the lid is removed.



Specifications:

Gel Size (W*L)	Sample volume	Buffer Volume	Dimension(L*W*H)	Net weight
48*75mm	3,5,9,1	~150ml	250*90*50(mm)	0.4kg

FSF-SPBT Horizontal Electrophoresis

Characteristics:

- Abundant buffer not only guarantees cooling effect, but also keeps the pH Value stable during the whole experiment process.
- Unfolded electrodes make repair and replacement easy and quick.
- With the sample background color design on the tray, convenient to adding the sample.
- The transparent top lid effectively prevents liquid in the cell from volatilizing and avoids electricity leakage.
- Auto-switch-off when the lid is removed.



Specifications:

Gel Size (W*L)	Sample volume	Buffer Volume	Dimension(L*W*H)	Net weight
78*100mm	10,15	~400ml	365*105*55(mm)	0.6kg

Mini-Protean Vertical Electrophoresis Cell FSF-SC22+

Characteristics:

- The installation of the glass plate in just 15 seconds, and does not need the knob, fast and convenient.
- With a gel casting in original position, no need to move glasses from gel making to electrophoresis running. It is more convenient to observe gel preparing through both sides of the glasses.
- High transparent polycarbonate material injection molding, impact resistance, high temperature resistance, corrosion resistance.
- Safety cover open button design, convenient opening the cover.
- With the background color, easy to be observed in the sample adding and electrophoresis process.
- Abundant buffer not only guarantees cooling effects, but also keeps the pH Value stable during the whole experiment process.
- Auto-switch-off when the lid is removed.



Specifications:

Glass plate size (W x L)	Gel Size (W x L)	Gel thickness	Gel amount	Sample volume	Buffer Volume	Dimension (L x W x H)	Net weight
100 x 100 mm	82 x 88 mm	0.75、1.0、1.5 (mm)	1 ~ 2 (pieces)	(0.75mm) 11、15 wells; (1.0mm) 11、15wells; (1.5mm) 11、15wells	~ 750 (ml)	150 x 120 x 115 (mm)	1.5 (kg)

Mini-Protean Electrophoresis Cell FSF-SC24+

Characteristics:

- The installation of the glass plate in just 15 seconds, and does not need the knob, fast and convenient.
- With the gel making device of normal position, don't should to moving the glass plate from the process of making gel to electrophoresis, convenient for observation the gel preparation from the glass on both sides, ensures fast set up times and leak-free operation.
- Safety cover open button design, convenient opening the cover;
- With the background color, easy to be observed in the sample adding and electrophoresis process;
- Abundant buffer not only guarantees cooling effects, but also keeps the pH Value stable during the whole experiment process.
- Auto-switch-off when the lid is removed.



Specifications:

Glass plate size (W x L)	Gel Size (W x L)	Gel thickness	Gel amount	Sample volume	Buffer Volume	Dimension (L x W x H)	Net weight
100 x 100 mm	82 x 88 mm	1.0、1.5 (mm)	1 ~ 4 (pieces)	(1.0mm) 11、15wells; (1.5mm) 11、15wells	~ 1000 (ml)	220 x 170 x 120 (mm)	2.5 (kg)

Digital Centrifuge FLC-04R-C

Characteristics:

- 1.Fixed angle rotor with capacity for 6 tubes of 15 mL (dimensions 16x100 mm)
- 2. Transparent polycarbonate lid for visualization and control of rotor.
- 3. LED display for adjustment and visualization of operation time and speed.
- 4. Safety switch that avoids centrifugation if the lid is open and that automatically stops operation in case of opening the lid.
- 5. Elastic suspension motor to assure a soft operation.
- 6. Sucker feet for a good fixation to the working surface.



Main Technical Parameters:

Model	FLC-04R-C
Control	Digital
Rotor	Fixed-angle
Speed	1000-4000 rpm (steps of 500 rpm)
Time	1-59 min (steps of 1 min)
Capacity	6x15 ml
Max. RCF	1790 g
Consumption	80 W
Power	220 V - 50 Hz

Digital Tabletop Low Speed Centrifuge

Characteristics:

- 1.DC brushless motor drive, digital display speed and running time
- 2.Mechanical door lock
- 3.Used for fat graft purification, PRP and other cosmetic surgery fields.



Main Technical Parameters:

Model	FTD-4C
Maximum speed	4000r/min
Maximum RCF	2350 × g
Max volume	12 × 15ml
Power supply	AC 220V 50HZ
Timer	1 ~ 99min
Noise	≤55dBA
Exterior Size (mm)	270 × 290 × 230
Packing Size (mm)	350x340x360
N.W / G.W (KG)	8 / 9



CORPORATE CULTURE

Company Philosophy

Innovativeness development is of overriding

Entrepreneurship

Practice of scientific management courage to dare to offer bold and innovative

Concentrate on doing business focus on development

Cultural ideas

Heavy responsibilities visionary strategist